PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ :		(11) International Publication Number:	WO 96/34491
H04N 7/025, 7/173	A1		
		(43) International Publication Date:	31 October 1996 (31.10.96)

(21) International Application Number: PCT/US96/05729 (81) D

(22) International Filing Date: 24 April 1996 (24.04.96)

(30) Priority Data: 08/428,809 24 April 1995 (24.04.95) US

(71) Applicant: TV GUIDE ON SCREEN [US/US]; Suite 201 South, 7600 E. Orchard Road, Greenwood Village, CO 80111-2523 (US).

(72) Inventors: ELLIS, Michael, D.; 1300 Kingwood Place, Boulder, CO 80304 (US). DAVIS, Bruce; 5505 Preserve Parkway South, Greenwood Village, CO 80121 (US). KNUDSON, Edward; 11055 W. Rowland Avenue, Littleton, CO 80127 (US). MILLER, Larry; 35 Glenmoore Drive, Greenwood Village, CO 80111 (US).

(74) Agents: RIZZI, Steven, J. et al.; Weil, Gotshal & Manges L.L.P., 767 Fifth Avenue, New York, NY 10153 (US).


(81) Designated States: AU, BR, CA, CN, JP, KR, PL, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published

With international search report.

Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: ELECTRONIC TELEVISION PROGRAM GUIDE SCHEDULE SYSTEM AND METHOD WITH REMOTE PRODUCT ORDERING



(57) Abstract

An electronic program schedule system with product ordering capability which includes a data processor for receiving program schedule information for a plurality of programs, and a user control apparatus, such as a remote controller, for generating user control commands and transmitting signals to the data processor in response thereto. The television program schedule information is displayed on a display apparatus such as a television receiver. A video display generator receives video control commands from the data processor and program schedule information and displays a portion of the program schedule information on the receiver. The program schedule information indicates the availability of a product or service for certain of the programs included in the program information, wherein the product or service is associated with the program, such as a program transcript or videocassette. The viewer utilizes the remote control apparatus t generate a first command for displaying information on the receiver describing the product or service, and a sec nd command for placing an order for the product or service. The data processor receives the user control commands and in response to the first command causes the vide display generator to display information describing the product or service and in response t the second command generates an order for the product r service.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	12	ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgystan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic	SD	Sudan
CF	Central African Republic		of Korea	SE	Sweden
CG	Congo	KR	Republic of Korea	SG	Singapore
CH	Switzerland	KZ.	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	u	Liechtenstein	. SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LR	Liberia	SZ .	Swaziland
CS	Czechoslovakia	LT	Lithuania	TD	Chad
cz	Czech Republic	LU	Luxembourg	TG	Togo
DB	Germany	LV	Latvia	TJ	Tajikistan
DK	Denmark	MC	Monaco	TT	Trinidad and Tobego
EE	Estonia	MD	Republic of Moldova	UA	Ukraine
ES	Spain	MG	Madagascar	UG	Uganda
FI	Finland	ML	Mali	US	United States of America
FR	France	MN	Mongolia	UZ	Uzbekistan
GA	Gabon	MR	Mauritania	VN	Viet Nam

ELECTRONIC TELEVISION PROGRAM GUIDE SCHEDULE SYSTEM AND METHOD WITH REMOTE PRODUCT ORDERING

Background of the Invention

This application is continuation-in-part a of application serial no. 247,101, which is a continuation-in-part of application serial no. 119,367. This invention relates to an 5 electronic program schedule system, which provides a user with schedule information for broadcast or cablecast programs viewed by the user on a television receiver. More particularly, it relates to an electronic program guide that provides the user with the capability to order products and services remotely at the user 10 location simply by depressing a button on a remote control device or other user-controlled device.

Electronic program guides ("EPGs") for television systems are known in the art. For example, one prior system used an electronic character generator to display textual schedule 15 information on the full screen of a television receiver. Other prior systems presented electronically stored program schedule information to a user for viewing while allowing the user to select display formats. Still other systems employed a data processor to input user-selection criteria, then stored only the 20 program schedule information meeting these criteria, subsequently used the stored information to automatically tune a programmable tuner or activate a recording device at the time of broadcast of the selected television programs. Such prior systems are generally discussed in "Stay Tuned for Smart TV," published in 25 the November 1990 issue of Popular Science.

Collectively, the prior electronic program systems may be difficult to implement and cumbersome to use. They also fail to provide viewing capabilities that address in a more realistic manner the viewing habits of the users of these electronic program 30 systems. Moreover, many of these systems are complex in their design and are expensive to implement. Ease of use and economy are primary concerns of television program distributors and viewers as they contemplat dramatic increases in the number and nature of program networks and other television-based services.

35 And, as the number of television channels available to a user

increases dramatically with the advent of new satellite and cable-

based technol gies, th utility of these pri r systems substantially diminishes.

These prior-art systems also fail to provide the us r with sufficient information, for example pricing and the like, 5 about pay-per-view events, premium services or other packaged programming to which the user does not subscribe, nor do they provide the user with the capability to automatically purchase such programming on demand or impulse. Moreover, these prior-art systems are deficient in that they fail to provide an efficient 10 and automatic method of updating or replacing the application software programs that implement the electronic guide at the user sites, relying instead on manual or other cumbersome forms of revision or replacement or hardware-based systems that can not be updated without physical replacement of integrated circuits and/or other parts.

Nor do these prior electronic guide systems have the capability of linking the user to other applications or information systems which are not part of the electronic program guide application or data.

Nor do these prior electronic guide systems provid 20 video promotion of television programs and services that ar functionally linked and visually displayed in an integrated Program promotion is an important element of th fashion. effective marketing of television programming. The promotion of 25 pay-per-view pay (i.e., "a la carte") programs and other unregulated program services is particularly important to cabl television operators in the wake of re-regulation by the federal The current method of promoting such programming government. using video is through dedicated "barker" channels that use full 30 screen continuous trailers (i.e., previews) which may or may not be accompanied by prices and ordering information. Recently, such promotional videos have been shown in split screens where part of the screen shows general schedule information for a time period roughly corresponding to the time period during which the general 35 program being promoted is shown. Accordingly, there exists a need for an electr nic pr gram guide which can pr vid impr ved display and linking of video prom tions with program schedule inf rmation and order processing functions.

The pri r el ctronic program guides also fail to provide the user with a simple and efficient method of controlling access individual channels and individual programs. The amount of adult situations involving sex and violence has steadily increased 5 during the last 40 years. The issue of how this affects children or other viewers has gained national attention. parent with the ability to lock-out a channel is a well known and widespread feature of certain television receivers and cable converter boxes. Despite this availability, the feature is seldom 10 used by parents. The main impediments to its effective use are the cumbersome ways in which it is generally implemented, as well as the requirement that entire channels be blocked in order to block access to any objectional programming. A channel-oriented parental lock is unfair to other programmers on the blocked 15 channel -- who, for example, offer adult-oriented programming in the evening and youth-oriented programming the following morning-and inconvenient for viewers who want access to such programs. Thus, there is a particular need for a system which provides password control to individual programs and channels using a 20 flexible and uncomplicated on-screen user interface.

The prior electronic program guides are also deficient in that they do not provide the user with the ability to view on demand current billing status and, thus, a need exists for a system which can provide the user with current billing information 25 on the user's demand.

An additional problem with prior program guides is that when displaying schedule information in grid format, i.e., columns representing time slots and rows representing channels, program titles generally are width-wise truncated to fit into the cells of 30 the grid. The width of a grid cell varies with the duration of the program. Since a 30 minute program is allotted only a small amount of space for the program title and description, titles and/or descriptions for half and even full hour programs often must be truncated in order to fit into the allotted space. Some 35 systems simply cut off the description of a program without abbr viating it in any way, such that the user is unable to determin th subject matter of the program. For example, a recent television program display included the foll wing text in a grid cell: "Bas ball: Yankees v." Although some systems

WO 96/34491

partially alleviate this problem by providing two lin s of t xt in each grid cell, this solution is not ideal because program d scripti ns may still be truncated.

A similar problem arises as the time slots change, 5 either automatically or in response to a user control command. Typically, 90 minutes of schedule information is displayed at one time and the 90 minute window is shiftable in 30-minut increments. In the case where a 30 minute shift causes a 30 minute size grid cell to display, e.g., a two-hour movie, it is 10 likely that the full title of the movie will not fit into the cell. Truncation of the title is thus required in this situation as well. In this case, while two lines of text may be desirable to fit the title in the 30 minute cell, the 60 and 90 minute cells may require only one line of text to display the title.

The prior electronic program quides also lack a method 15 for creating a viewing itinerary electronically while still viewing a program currently appearing on the television receiver. Moreover, these prior program guides leave much guess work for the user as he navigates through a sequence of channels. When 20 skimming through channels to ascertain the program then being displayed on any channel, commonly known as "channel surfing," the user needs to guess which program is currently being aired from the video encountered as the user surfs through the channels. Since much -- in some cases, up to 30% -- of the programming 25 appearing on any given channel at any given time is advertising or other commercial programming, the user is not provided with any clues as to what program is appearing on a selected channel at a given time and must therefore wait until the advertisement or commercial is over before ascertaining the program then appearing 30 on the selected channel. Thus a need exists for a program guide which displays current program schedule information for each channel as the user surfs through the available channels.

Interactive home shopping services are also known in the art. Lacking in the art, however, is an interactive home shopping 35 service deployed in conjunction with an EPG permitting users of th EPG t remotely rder products and services associated with the EPG r the program listings included in th EPG.

In addition, with the availability of techniques for electronically blocking the home recording of copyrighted

programs, it is now possible to prevent the loss of copyright royalties and the revenues that result when a home view remak is an archival copy of a copyrighted program. Many viewers may be willing to pay for professional copies of these programs that they can no longer copy themselves by recording off-the-air. As a result, a new marketing opportunity is available if a convenient means for acquiring purchased archival copies of copyrighted programs can be provided. Users who would otherwise have produced an amateur recording of a program using consumer equipment may decide to purchase a professionally produced and packaged copy from a licensed distributor if they are unable to record the program on their own.

Accordingly, there is a need in the art for a simplified electronic program schedule system that may be more easily implemented, and which is appealing and efficient in operation. There is also a need to provide the user with an electronic program schedule system that displays both broadcast programs and electronic schedule information in a manner not previously available with other electronic program schedule systems, 20 particularly those using a remote controller.

For example, there is a particular need for a flexible program schedule system that allows a user to view selected broadcast programs on a portion of the screen of the television receiver while simultaneously viewing program schedule information 25 for other channels and/or services on another portion of the screen. There is also a need for such a program schedule system that permits the user to select from a plurality of selectable display formats for viewing the program schedule information. It is also preferred to have a system that indicates to the user 30 those keys on the remote controller that are active in any particular mode of operation. There also exists a need for such a system that will give a user the capability to set a programmable reminder for viewing a program scheduled to air at a future time.

There is also a need for an electronic guide system providing the user with comprehensive information about pay-per-view events, premium services or other packaged programming to which the user does not ordinarily subscribe, and which provides the user with the capability to automatically purchase such

pr gramming on demand or impulse. There is also a need for an electronic guide syst m pr viding a reliable and efficient method of updating or replacing the application software that impl ments the electronic guide at the user sites.

There also exists a need for an electronic program guide that operates as a shell or window to provide the user with the capability to access other applications or information systems that are not part of the electronic program guide application or data.

There also exists a need for an interactive home shopping service deployed in conjunction with an EPG permitting users of the EPG to remotely order services and products associated with the EPG or the program listings included in the EPG.

There is also a need for a convenient means for purchasing archival copies of copyrighted programs that cannot be recorded by viewers.

It is accordingly an object of the present invention to provide a system that will allow the user to view a broadcast 20 program while, at the same time, interactively viewing program schedule information for other programs.

It is another object of the present invention to provide the user with the ability to select from among a plurality of display formats for the program schedule information.

It is yet another object of the present invention to indicate to the user of the program schedule system those keys on the remote controller active in the particular mode of operation of the system at the time of use.

It is a still further object of the present invention t 30 provide the user of the electronic program schedule system with the capability of setting programmable reminder messages for any future program.

It is yet a further object of this invention to provide the system user with comprehensive information about pay-per-view 35 events, premium services or other packaged programming to which th us r d s n t subscrib and th capability to automatically purchase such programming on demand or impulse.

It is an ther bject of th present invention t provide an el ctronic guide system that pr vides a reliabl and efficient

method of updating or replacing the application software programs that implem nt the electronic guide at the user sites.

It is still another object of the electronic program guide to operate as a shell or window to provide the user with the 5 capability to access other applications or information systems which are not part of the electronic program guide application or data.

It is yet another object of the electronic program guide to provide a system whereby video promotion of television programs 10 and services are functionally linked and visually displayed in an integrated fashion to facilitate the marketing and sale of such programs and services.

It is still a further object of the present invention to provide password control for access to individual programs, as 15 well as channels, using a protected interactive flexible and uncomplicated on-screen interface.

Another object of the present invention is to provide the user with current programming information for all programs as the user surfs through the available channels.

It is yet a further object of the present invention to provide a system in which the user can access his current billing information on demand.

It is another object of the present invention to provide a system which overlays television program listings against 25 varying background views.

It is yet another object of the present invention to provide an improved display of text in the grid cells comprising a page of television program listings.

It is a further object of the invention to provide an 30 electronic television program guide with an interactive home shopping service for ordering products and services associated with the EPG or a particular program.

It is a further object of the invention to provide an electronic television program guide with an interactive home 35 shopping service for ordering products and services associated with th EPG raparticular program simply by depressing a button on a remot c ntrol device or other user-c ntr ll d selection means.

These and other objects f the invention are achieved by an el ctr nic pr gram schedule syst m which includ s a rec iv r f r rec iving broadcast, satellite or cablecast televisi n programs for a plurality of television channels and a tuner for 5 tuning a television receiver to a selected one of the plurality of A data processor receives and stores in a memory channels. television program schedule information for a plurality of television programs to appear on the plurality of television channels. A user control apparatus, such as a remote controller, 10 is utilized by a viewer to choose user control commands and transmit signals in response to the data processor which receives the signals in response to user control commands. A television receiver is used to display the television programs and television program schedule and other information. A video display generator 15 receives video control commands from the data processor and program schedule information from the memory and displays a portion of the program schedule information in overlaying relationship with a television program appearing on a television channel in at least one mode of operation of the television 20 programming guide. The data processor controls the video display generator with video control commands, issued in response to the user control commands, to display program schedule information for any chosen one of the plurality of television programs in overlaying relationship with at least one television program then 25 appearing on any chosen one of the plurality of channels on the television receiver.

The EPG system of the present invention is further provided with an interactive home shopping service permitting the user to order products or services associated with a program from 30 an EPG display using a remote control device or other usercontrolled selection means. The data processor is configured to generate user product and service requests and provide them to a central location for processing. Telephone lines, cable, optical fiber, or wireless transmissions may be used for providing the 35 requests to the central location.

Brief Description of the Drawings

Fig. 1 is a block diagram showing various components of the preferred embodim nt f the inventi n herein.

- Fig. 2 is a block diagram showing the combination of pr gram and schedule information by th video verlay device utilized in the pr ferred mbodiment of the invention.
- Fig. 3 depicts a remote controller that can be used in 5 connection with the preferred embodiment of the electronic program guide system of the present application.
 - Fig. 4 depicts an alternative embodiment of the remote controller shown in Fig. 3.
- Fig. 5 shows an overlay appearing on a television screen 10 in one mode of operation of the preferred embodiment of the present invention.
 - Fig. 6 is a menu that appears on a television screen in a MENU mode of operation of the preferred embodiment of the present invention.
- Fig. 6A is yet another menu that appears on a television screen in a MENU mode of operation of the preferred embodiment of the present invention.
- Fig. 7 depicts a Viewer Preference Menu that appears on a television screen in one aspect of the preferred embodiment of 20 the present invention.
 - Fig. 8 shows a Preferred Channel selection submenu.
 - Fig. 9 shows an impulse ordering menu that appears on a television screen in one aspect of the preferred embodiment of the present invention.
- Fig. 10 shows a Premium Services submenu that appears in one mode of operation of the preferred embodiment of the present invention.
- Fig. 11 shows a graphic overlay appearing on a television screen in a BROWSE mode of operation of the preferred 30 embodiment of the present invention.
 - Fig. 12 shows a graphic overlay appearing on a television screen in a BROWSE mode of operation of the preferred embodiment of the present invention having different information from that shown in Fig. 11.
- Fig. 12A shows a graphic overlay appearing on a televisi n screen in a BROWSE mode of operati n in the present inventi n displaying schedule information for a time and channel oth r than that shown in Fig. 11.

WO 96/34491 10

Fig. 13 shows a graphic overlay appearing in a REMINDER f operation of th preferr d mbodim nt f th mode invention.

Fig. 14 shows yet another graphic overlay appearing in 5 a REMINDER mode of operation of the preferred embodiment of th present invention.

Fig. 15 is yet another menu that appears on a television screen in a MENU mode of operation of the preferred embodiment of the present invention.

Fig. 16 is yet another menu that appears on a television 10 screen in a MENU mode of operation of the preferred embodiment of the present invention.

Fig. 17 is yet another menu that appears on a television screen in a MENU mode of operation of the preferred embodiment of 15 the present invention.

Fig. 18 shows a grid listing of schedule information displayed in an All Listings mode of operation of the preferred embodiment of the present invention.

19 shows schedule information displayed in a 20 Listings By Category mode of operation of the preferred embodiment of the present invention.

Fig. 20 shows schedule information displayed in a Listings By Channel mode of operation of the preferred embodiment of the present invention.

Fig. 21 shows information displayed in response to a 25 user's request for supplemental programming information.

22 shows programming, ordering and promotional information displayed in a Pay-Per-View mode of operation of the preferred embodiment of the present invention.

30 Fig. 23 shows an ordering submenu used in conjunction with the mode of operation shown in Fig. 22.

Fig. 24 shows yet another ordering submenu used in conjunction with the mode of operation shown in Fig. 22.

Fig. 24A shows yet another ordering submenu used in 35 conjunction with the mode of operation shown in Fig. 22.

shows another grid listing of schedul 25 information display d in an All Listings m de of operati n f the present inv ntion.

Fig. 26 shows a Premium Services submenu that appears in ne mode of operation of the preferred embodim nt of the present inventi n.

Fig. 27 shows a Messages menu that appears in one mod 5 of operation of the preferred embodiment of the present invention.

Fig. 28 shows exemplary messages used in connection with the menu of Fig. 27.

Fig. 28A is an alternative message menu.

Fig. 29 shows billing information used in connection 10 with the menu of Fig. 27.

Fig. 30 shows a Key Lock Access menu that appears during one mode of operation of the preferred embodiment of the present invention.

Fig. 31 shows a menu appearing in connection with an 15 Interactive Television mode of operation of the preferred embodiment of the present invention.

Fig. 32 shows information that appears in a Quote Watch menu in connection with the Interactive Television mode of operation shown in Fig. 31.

Fig. 33 shows other information that appears in connection with the Interactive Television mode of operation shown in Fig. 31.

Fig. 34 is a menu showing information that appears in a news display in the Interactive Television mode of operation of 25 the preferred embodiment of the present invention.

Fig. 35 is a menu showing information that appears in a sports display in the Interactive Television mode of operation of the preferred embodiment of the present invention.

Fig. 36a-d is a flow chart showing the operation logic 30 required for implementation of a computer program for the electronic program guide.

Fig. 37 is a menu showing a Locator screen for locating channel numbers and defining favorite channel lists.

Fig. 38 is an alternative menu that can be used in a 35 MENU mode of operation of the electronic program guide.

Fig. 38A and 38B show, respectively, an alternative main m nu scr en and a listing-by-tim screen accessibl from the alternative main menu.

Fig. 39 is a Lockout menu that alternatively can be used for permitting or prohibiting acc ss to certain programs.

Fig. 40 is a S tup m nu that can be used to set text location and a purchase code for premium and pay-per-view 5 programming.

Fig. 40A shows an exemplary menu for inputting a lockout code.

Figs. 40B through 40E show, respectively, exemplary menus for entering, confirming, clearing or changing a purchase 10 code.

Fig. 41 is a Lockout Verify menu that is used in connection with the Lockout menu of Fig. 39.

Fig. 42 is a flow chart showing the operation of the preferred embodiment of the textfit system of the invention 15 herein.

Figs. 43A-E illustrate one embodiment of a series of screens that may be used for ordering a product associated with a program displayed in the EPG.

Fig. 44 illustrates one embodiment of a screen that may 20 be presented to the user upon user activation of the ordering process while the cursor is highlighting a program listing for which a product or service is available.

Fig. 45 illustrates the product or service ordering feature in conjunction with the flip mode of the system of the 25 present invention.

Fig. 46 illustrates the product or service ordering feature in conjunction with program information for a music program.

Fig. 47 is a block diagram of an alternate embodiment of 30 the system of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT System Configuration

Fig. 1 is a block diagram showing various components of the electronic program schedule system generally designated as 10.

35 Physically, these syst m components can be located in a user's set-top cable converter box or other signal reception or processing device, such as a satellite receiver. Alternatively, the components can be mounted in a s parate housing, or included

as part of a television receiver, VCR, personal computer, or multim dia player; or reside as a distributed applicati n in a broadband netw rk architecture.

An input signal 11 is connected to a receiver 12, which 5 receives a transmitted data stream from a data provider. The data stream may contain, for example, information about programs or services available in a particular market, geographical or otherwise. The input signal 11 can originate, for example, as part of a standard broadcast, cablecast or satellite transmission, or other form of data transmission, such as video dial tone. The data provider is a program information provider, the satellite uplink manager, a local cable operator, or a combination of these sources, and the data stream contains program schedule information for all television programs and other services available in the 15 operator's geographical market.

The data stream may be modulated and then transmitted on the cable line in any number of ways, including as part of a dedicated channel transmission operating at a frequency of, for example, 75 MHz. Those of skill in the art will understand that numerous other transmission schemes can be used to transmit the data stream, such as embedding it in the vertical blanking interval of a program broadcast signal. As will be discussed in greater detail below, according to the present invention, the transmitted data stream may additionally contain application software for implementing or updating the electronic program guide at the user site.

The transmitted program schedule data or application software is received by the receiver 12 on signal input line 11. The received signal is passed from the receiver to a data 30 demodulator 13, such as a QPSK demodulator or a GI Info-Cipher 1000R, which demodulates the transmission and passes it to a buffer 15.

A microcontroller 16, such as a M68000EC, receives data passed to the buffer 15. Bootstrap operating software, which may 35 be used for capturing electronic program guide application software updates, is st red in a read only memory (ROM) 17. The microc ntroller 16 uses the r ceived program schedule information to build a database by st ring the data in appr priately organized rec rds in dynamic random access mem ry (DRAM) 18. The st red

sch dule inf rmation can be updated n a periodic basis, such as hourly, daily or weekly, or at any tim when changes in scheduling or other fact rs warrant an update. The syst m also includes a system clock 19.

5 Alternatively, the program schedule information could be supplied in a ROM, disk or other non-volatile memory, or it could be downloaded to a storage disk or other data storage device. The invention herein is not directed to the particular method transmission or reception of the schedule information.

If the microcontroller 16 recognizes the received data 10 as application software which controls the program schedule system, as opposed to program schedule information, it stores it non-volatile memory, such as an electrically erasable programmable ROM (EEPROM) 20 or battery-backed static RAM (SRAM). 15 This configuration allows revised or replacement versions of the application software to be downloaded directly from the software developer to the user site through the cable or other transmission system.

In the case where an EEPROM is utilized, revised or 20 replacement versions of the application software downloaded from the developer are first stored in DRAM 18 by the microcontroller 16, under direction of the downloading operating software stored in the ROM 17. The stored application software can then be checked for accuracy by, for example, a checksum analysis or other 25 verification routine.

After the accuracy of the application software has been verified, the microcontroller 16 initiates a routine to re-program the EEPROM 20, where the application software is permanently stored. The microcontroller 16 will issue proper control commands 30 to a reprogram circuit 21, which is adapted to supply the proper program voltage and logic control signals 22 required to erase and write to the EEPROM. It supplies this program voltage, Vproq, as well as any other required control signals, such as read or write enable, to the EEPROM 20 upon command from the microcontroller 16. 35 After been electrically the EEPROM 20 has erased, the microcontroller 16 initiates transfer of the new application

Wh n a battery-backed SRAM is utilized as non-volatile memory, th microcontroller stores the revised or replacement

software from the DRAM 18 t the EEPROM 20 for st ring.

version of the applicati n software downloaded from the devel per directly in the SRAM, again under direction of the d wnloading operating software stred in the ROM. The stored application software can then be checked for accuracy by, for example, a 5 checksum analysis or other verification routine.

When power is first applied to the system 10, the bootstrap operating software verifies that the program guide application software is resident in memory. If it is not resident, the bootstrap operating software waits for a download of Once the application software is resident, the 10 the software. microcontroller 16 executes the application program software from dedicated portion of the DRAM 18. Alternatively, application software can be executed directly from the nonvolatile memory 20. Under control of the program guide 15 application software, the microcontroller 16 first verifies that the program schedule information is resident in DRAM 18. If it is not resident, the microcontroller waits for a download of the program schedule information, as discussed above. Alternatively, if the application program is resident in memory, but the database 20 records containing the program schedule information data are not yet available, the application software can be configured to carry out other tasks, such as allowing the user to carry out functions not requiring the program schedule information data, as well as displaying an appropriate message indicating the database data is 25 not yet available.

When the schedule system is operating, as discussed in greater detail hereinbelow, the microcontroller 16 takes the program schedule information stored in the DRAM 18 and, in conjunction with other downloaded data types such as stored bit 30 maps for the screen configuration and the graphic symbol or logo displays stored in non-volatile memory 20 or, alternatively, in DRAM 18, supplies it to a video display generator (VDG) 23, which in the present embodiment may be a commercially available VGA-type graphics card, such as a Rocgen card manufactured by Roctec. The 35 VDG includes a standard RGB video generator 24, which takes the digital pr gram schedule information sent by the microc ntroller 16 and c nverts it t an RGB format in acc rdanc with the bit map for th particular screen display th n being presented to the user n the tel vision receiver 27. Th configuration of each scr n

is sh wn and discuss d in greater detail in the System Operation section below.

The VDG also includes a Vide Overlay Device 25, which accepts the RGB video input, as well as an 5 conventional television tuner 28, such as a conventional tuner manufactured by General Instrument or a Jerrold DPBB tuner, which supplies a program signal in standard NTSC video format. overlay device 25 converts and combines the RGB signal with th signal from the tuner 28, and produces a composite NTSC output 10 signal containing both the program signal and the program schedul information, as shown in Fig. 2. This composite video signal is supplied to a modulator 26, shown in Fig. 1, which can be a modulator such as available from Radio Shack, and then to th television receiver 27, which the user keeps tuned to the 15 modulated channel, for example, channel 3 or 4. The composite video signal can also be supplied directly to the television receiver 27 or other receiving device from the VDG through a video port 25A on the VDG.

The system components identified in connection with Fig. 20 1 can all be implemented in a preferred platform by, for example, an IBM personal computer equipped with a transmission link and a video graphics card, such as those manufactured by Roctec. Other platforms, such as a cable converter box equipped with a microprocessor and memory, or a broadband network also could be 25 used. Examples of the particular components are as follows: Microcontroller -- Motorola part no. MC68331-16; ROM -- Texas Instruments part no. TMS27PC512; DRAM -- Texas Instruments part no. TM4256; EEPROM -- Intel part no. 28F001BX-T. In any event, those of skill in the art will appreciate that the particular 30 details of the hardware components and data storage are a function of the particular implementation of the system, and are not the subject of the present invention.

As discussed in detail below, the user may navigate through the program schedule system with a remote controller, such 35 as that shown in Fig. 3, which operates on conventional principles of rem te c ntrol transmitter-receiver logic, such as by infrared or other signalling, r other suitable user interfac. The rem t c ntroller 31 c mmunicates with the microc ntroller 16 through th remote controller receiver 29, shown in Fig. 1, which can be a

WO 96/34491 PCT/US96/05729

Sil nt Partn r IR rec iv r and which receives signals transmitted by the rem te controller 31 and supplies th micr controller 16 with a corr sponding digital signal indicating the key depressed by the user.

A remote controller suitable for the present invention, such as shown in Fig. 3, which can be a remote controller manufactured by Universal Electronics or Presentation Electronics' Silent Partner, may include a power switch 32, volume 33 and mute 34 controls, an ENTER key 35, 0-9 digit keys 36, four direction arrow keys 37A and 37B, a MODE key 38 and an information key 39 that is designated with a lower case "i." The power 32, volume 33 and mute 34 keys operate in the same manner as conventional remote controllers typically used with present-day television receivers. The numeric digit keys 36 also function in much the same manner as conventional remote controllers. A brief description of the remaining keys follows.

The MODE key 38 takes the user through various layers of the electronic program schedule system 10 and generally allows the user to return to a previous screen when he is in a submenu. 20 up/down direction arrow keys 37A allow a user to navigate through the different TV program channels when the program schedule system is in a FLIP or BROWSE mode, as will be fully described below, and also allow the user to navigate through highlighted bars displayed on the TV screen when in a MENU mode. The left/right direction 25 arrow keys 37B allow the user to navigate through selected time periods when the program schedule system is in the BROWSE mode, as will also be described below. They further allow the user to across subject-matter categories while "Categories" submenu of the MENU mode, as well as to navigate 30 across time periods when the program schedule system is in a payper-view ordering mode and, in general, navigate in left or right directions to select various icons and other objects. information, or "i," key 39 allows the user to view supplemental program and other information during the various modes of the 35 program schedule system. The ENTER 35 key fulfills and inputs a command onc the user has made a selection from the rem te contr ller k ys. The functi n and perati n of these keys will be made m re apparent in the detailed discussion f th FLIP, BROWSE and MENU m des below.

A sec nd embodiment of the remote c ntr ller 40 is shown in Fig. 4. This embodiment f the rem te c ntr ller als includes a power key 41, num ric digit keys 42, direction arrow keys 43A and 43B, information key 48, ENTER or SELECT or "OK" key 44, 5 volume control 45, lockout key 45A, mute keys 46 and help key 48A. It also includes pound sign and star keys.

This embodiment of the remote controller further includes a number of icon keys 47A and 47B, which correspond to different submenus or modes of the program schedule system. The icons 47A and 47B may also be displayed on the TV screen when the program schedule system is operating. The icon keys essentially replace the MODE key 38 used in the embodiment of the remote controller shown in Fig. 3. Using these keys, the user can move from one mode to another simply by depressing the icon key is corresponding to the desired mode of operation of the program schedule system. In the embodiment of Fig. 4, the icons 47A and 47B are shown as graphic symbols situated directly above a corresponding color-coded key. Alternatively, the color-coded keys could be eliminated and keys could be formed in the image of the icon itself.

The embodiment of the remote controller shown in Fig. 4 also includes three color-coded viewer preference or favorite channel keys, 48A, 48B and 48C that are situated directly above the icon keys. Each of these keys indicates to the program 25 schedule system a distinct user-created "Channel Preference" or "Favorite Channel" list, which is a listing of a specific subset of channels for a particular user, arranged in the sequential order that the user wishes to view during operation of the program schedule system. The creation of the Channel Preference or 30 Favorite Channel list is discussed in the following section. Thus, the system provides for at least three individual channel subsets for three individual users.

The remote controller of Fig. 4 also may be equipped with a "HELP" key 48A, which, when depressed, causes the 35 microcontroller 16 to retrieve previously stored instruction messages from memory and cause them to be displayed on the t levision r ceiv r 27. These messages ffer help to the user in the form of instructions that guide the user through the operation of the various operating modes of the electronic television

program guide. Th y may b text messages, or instructional video images, r audio programs, depending on the storage capacity f syst m, r any combination of these. Moreover, these help messages may be created so that they are context-sensitive, i.e., 5 the messages displayed depend entirely upon the precise point in the operation of the electronic program guide that the user depresses the help key 48A. For example, information could be supplied for operation of the remote controller, for operating the FLIP or BROWSE mode (discussed below), or any other mode of 10 operation of the guide, for impulse ordering, for setting a In order to accomplish this, each point of lockout, etc. operation of the guide could be coded so that the microprocessor could track the current operating point, for example, temporarily storing the code reflecting the present operating 15 point as the user operated the guide. When the user pressed the help key 48A, the microcontroller 16 would retrieve an appropriate set of messages based on the presently stored operating point code. Additionally, the i key 39 could be used to carry out the function of the help key.

Additionally, each of the functions of the remote controllers can also be integrated into a keypad on the user's cable box or other hardware.

System Operation

In operation, the electronic program schedule system of 25 the present invention functions as follows.

FLIP Mode

When the user is viewing a particular program channel on the television receiver, the program schedule system defaults to a FLIP mode, shown in Fig. 5. In this mode, a graphic overlay 51 containing programming information for the channel currently tuned on the tuner is superimposed in overlaying relationship with a received program signal 55 on the screen of the television receiver 27 whenever the viewer changes the program channel, for example, by using the up/down direction arrows on the remote controller. The video overlay device 25, such as shown in Fig. 1, c mbines the computer-generated RGB video-graphic overlay information with the NTSC-f rmat program signal from the tuner 28, and supplies an NTSC-format output signal, which includes the

program signal fr m th tun r and the program schedule overlay inf rmation for viewing on the television receiver 27.

The programming information contained in the graphic overlay 51 is supplied to the RGB video generator by the 5 microcontroller. In FLIP mode, the microcontroller first searches the program schedule database in, for example, the DRAM 18 to retrieve the programming information for the currently tuned channel 52 corresponding to the current time; i.e., the time at which the user just turned on the television receiver for viewing.

10 The microcontroller 16 then supplies the current channel and program information to the RGB video generator 24 which converts the digital data information to RGB format and supplies it to the video overlay device 25.

In normal operation, the microcontroller 16 defaults to displaying all channels offered by the cable company prioritized by numeric order, which is determined by the broadcast channel position in the radio spectrum or the marketing judgments of local cable operators. Using a "Channel Preference" submenu, or an alternative "Locator" screen, both of which are discussed below, 20 the user can revise the content and/or sequential order of the channels presented to the television receiver 27.

In general, if the user does not issue a change-channel instruction, or other command, from the remote controller 40 within a predetermined time interval while in the FLIP mode, the 25 microcontroller 16 instructs the VDG 23 to remove the graphic overlay 51 from the television receiver, thus presenting only a program signal 55 to the television receiver 27 for viewing. duration of the predetermined time interval is such that it allows the user sufficient time to read the programming information 30 contained in the overlay. The duration of the predetermined time interval during which the graphic 51 overlay appears is stored in location in non-volatile memory 20 addressable by microcontroller 16. The user can change the duration of the time interval, by first entering a Viewer Preference mode, and then 35 selecting an "overlay interval" entry. The microcontroller 16 then causes a user prompt to be display d on the screen which, for example, asks the user to select an appr priate time period for displaying in the graphic overlay on the screen. num ric keys, the user can input an appropriat response, for

xample, a peri d betw en 5 and 60 sec nds, and then depress ENTER. The new int rval period is th n read and stored by the micr contr ller 16 in the v rlay time interval location in memory.

- 5 If the user issues a change-channel command from the remote controller 40 before or after the predetermined overlay period has elapsed, either by using the up/down direction arrows 43A, or by entering a desired channel number using the numeric keys 42 and then depressing the ENTER key 44, the microcontroller 10 16 will cause the tuner 28 to tune to the desired channel -either the channel immediately preceding or following the current channel when the up or down arrow 43A is used or the specific channel entered on the numeric key pad by the user -- and will also search for and immediately cause to be displayed the current 15 program information for that channel. Thus, as the user flips through the channels, the program schedule information for any selected channel automatically appears in the graphic overlay 51 while the actual program 55 appearing on the selected channel at the particular time occupies the remainder of the screen.
- The system can also be configured to issue an error message, such as an audible beep or displayed text indicating an invalid key stroke, if the user depresses either the left or right direction arrow keys while in the FLIP mode.

BROWSE Mode

- To initiate the BROWSE mode, the user depresses the MODE switch once while in the FLIP mode when using the first embodiment of the remote controller 31 shown in Fig. 3. Utilizing the second embodiment of the remote controller 40 shown in Fig. 4, the user would depress the button below the BROWSE icon 47A.
- In the BROWSE mode, the user is provided with the ability to scan through program schedule information for any channel, including, but not limited to, the channel being viewed, while at the same time continuing to view the TV program previously selected. As shown in Fig. 11, in this mode the graphic overlay information that appears in the FLIP mode is replaced with pr gramming information for the channel being browsed, which may or may not be the channel currently being viewed by the user. After the user issues the command from the

remote controller 40 to enter the BROWSE mode, a graphic overlay 111 is generated, as in the FLIP mode, with program schedule informati n for the currently tuned chann 1 112 and a t xtual BROWSE indicator 113 to remind the user of the currently active 5 mode, as shown in Fig. 11.

If the user depresses either the up or down direction arrow on the remote controller 40 while in the BROWSE mode. program schedule information for either the prior or next channel is displayed in the graphic overlay portion 111 of the television 10 receiver screen 27, while the tuner remains tuned to the channel program that appeared on the television receiver at the time the user entered the BROWSE mode, as shown in Fig. 12, and continues Each successive depression of the up or down to so appear. direction arrow key produces corresponding program schedul 15 information for the selected channel. The graphic overlay may also include a small video window for showing the actual video signal of a currently aired program or a clip of a future program corresponding to the schedule information then appearing in the BROWSE overlay. In this way, the user can simultaneously scan 20 program schedule information for all channels while continuously viewing at least one selected program on the television receiver. With the advent of sophisticated television receivers, it may also be possible to simultaneously display multiple broadcast programs on a single screen for viewing, or to split the screen to show, 25 for example, broadcast programs in combination with advertisements. The BROWSE feature could be used in any of these situations.

If, at any time during scanning of the program schedule information in the BROWSE mode, the user desires to tune the 30 television receiver 27 from the program channel currently being viewed to the program channel indicated in the schedule information in the graphic overlay, he simply depresses the ENTER button 44 and the tuner 28 will be tuned to that channel. If the user does not want to view another channel and wishes to exit the 35 BROWSE mode, thus removing the graphic overlay 111 with the pr gram schedule information, he must depress the MODE key twice in the first embodiment f th rem te c ntroller 31. The first d pression of the MODE key takes the user to the MENU m de, discussed below, and th s cond depression will take th user to

WO 96/34491 PCT/US96/05729

th FLIP mode. Once in th FLIP m d, the graphic overlay will be removed after the duration of th time-out interval has passed. In the second embodim nt of the r mote controller shown in Fig. 4, the user toggles the BROWSE icon key to deactivate the BROWSE 5 mode.

When the user first enters the BROWSE mode and begins scanning channels, the schedule information appearing in the overlay portion 111 describes the programs currently playing on In order to view programming information any particular channel. 10 for later or earlier times, the user employs the left and right direction arrows 43B. As a consequence, the system will display future program schedule information for the particular channel previously selected by the up and down direction arrows, whether it is the channel currently being viewed or any other available 15 channel. The schedule information presented includes the name of the program and program start/stop time. The instant embodiment of the system, in order to conserve memory, will not allow the user to view programming information for a time prior to the current time. The system could be easily modified to provide such 20 information if adequate memory is made available. desirable, for example, to allow a user to view schedule information for an earlier time to find a particular show and then allow the user to command the microcontroller to find and display future airing dates of the show, or the microcontroller could 25 simply do this automatically.

When viewing program schedule information for a future time in the BROWSE mode, the displayed time of airing 121 of the particular show 122 is highlighted, as well as the channel number and service indicator 123, as shown in Fig. 12A. Such highlighted information reminds the user that he is viewing program schedule information for a future time. Also, when viewing program schedule information for a future time on any particular channel in the BROWSE mode, depression of the channel up direction arrow key on the remote controller 40 causes programming schedule information for the next channel to appear, which corresponds in time to the futur time that was being viewed b f re the up key was d pressed by th user. The channel d wn direction arrow key 43B functions identically in this mode.

If whil viewing program schedule information for a futur time in BROWSE mode th user depresses the ENTER key on the remote contr ller, the microc ntroller 16 will instruct the VDG 23 to display a REMINDER overlay message 130 which, as shown in Fig. 5 13, is displayed as a second overlay 131 appearing above the BROWSE overlay 132. The REMINDER message 130 queries the user as to whether the system should remind the user, at a predetermined time before the start of the selected program, that he or sh would like to view the selected program, as shown in Fig. 13. 10 the user responds affirmatively, the microcontroller 16 stores reminder data consisting of at least the channel, time and day of the selected program in a reminder buffer, which contains similar schedule information for all programs for which the user has set a reminder. At a pre-determined time before the selected program 15 start time, for example, five minutes, the microcontroller 16 will retrieve schedule information, including title and service, based on the reminder data, and will instruct the VDG 23 to display a REMINDER overlay message 140 on the television receiver 27, as shown in Fig. 14, to remind the user that he or she previously set 20 a reminder to watch the selected program. The REMINDER message 140 contains the channel, service and start time. displays the number of minutes before the time of airing of the particular show and updates the display every minute until the time of airing. The REMINDER message 140 also displays a "TUNE" 25 inquiry, which asks the user if she would like to tune to the selected program. When the user sets multiple reminders, the reminder overlays are stacked, for example, in ascending order according to the time each reminder is scheduled to be displayed, and the next reminder message will appear on the television 30 receiver after the user takes appropriate action to remove the reminder message then being displayed. The REMINDER message (140 could also be adapted to allow the user to display or modify a list of all reminders previously set by the user. As with the overlay display time period in the FLIP mode, the user can modify 35 the time period before a selected program that the REMINDER appears by entering the Viewer Preference mode and revising the time ntry.

MENU Mode

Using the r mote controller 31 shown in Fig. 3, the user can ent r th MENU m d from the BROWSE mode or from the FLIP mode by toggling the MODE button 38 once or twice, respectively. Using 5 the remote controller 40 of Fig. 4, the user would simply depress the key 47B corresponding to the MENU icon.

Referring to Fig. 6, in the MENU mode, the system displays a plurality of menu items and icons, which correspond to and allow user selection of distinct program schedule information 10 display formats, local cable system message boards and other online information services. The MENU screen shown in Fig. 6 is a full-screen display. In the embodiment shown in Fig. 6, there are four vertically selectable horizontal bars 61-64, which are accessed using the up and down direction arrows 43A on the remote 15 controller 31 or 40. At the extreme left of each bar, identifying icon 61A-64A is displayed, which identifies the information contained in that bar. In the embodiment of Fig. 6, the "TV GUIDE" icon 61A in the first bar corresponds to program schedule information from TV Guide® magazine, the "NOW SHOWING" 20 icon 62A in the second bar 62 corresponds to pay-per-view and premium service events, the "MSO Logo" icon 63A in the third bar 63 corresponds to Customer Service or local cable company information messages, and the circular icon 64A in the fourth bar 64 corresponds to other interactive services available to the 25 user, or in the case of broadband networks, other venues, e.g., home shopping, banking or telephone use. As also shown in Figs. 6 and 6A, each bar also contains a textual description of its contents.

When the user first enters the MENU mode, the system 30 defaults to selection of the program schedule bar. When a particular bar is selected, the textual description is removed and a plurality of icons or identifying windows are displayed adjacent the identifying icon. In Fig. 6, the program schedule bar 61 is selected. Using the up or down direction arrow key on the remote 35 controller 40, the user selects a vertically adjacent bar. Figs. 15-17 show, respectively, selection of the Pay-Per-View bar 62, the Customer Servic or Messages bar 63 and the Int ractive TV services bar 64.

An alternative MAIN MENU screen 215 is shown in Fig. 38. Certain sel ction screens accessible from the menu shown in Fig. 38 ar shown in Figs. 38A and 38B. It has three horizontally selectable bars: program schedule 205, Home Theater 206 and 5 Customer Service 207. The MAIN MENU screen 215 also contains an additional "Locator" identifier, which is described below.

Once a particular bar in the MENU screen is selected, the user can select a particular icon from the plurality of horizontally selectable displayed icons 65A-65C by using the left 10 or right direction arrow and the ENTER key on the remote controller 40. Each icon contains a graphical symbol appearing in a background window of a particular color. When a particular icon is selected, it is offset from its background window and the color of the window changes. In Fig. 6, the grid icon 65A immediately 15 adjacent the "TV GUIDE" icon in the first bar 61 is selected.

The function corresponding to the selectable entries in the MAIN MENU screen will now be discussed with reference to Fig. It will be appreciated by those of skill in the art that the same functionality applies in the categories shown in the MAIN 20 MENU 215 shown in Fig. 38.

In the uppermost vertically selectable horizontal bar 61, the first grid icon 65A represents an "All Listings" mode in which the program schedule information is displayed in a grid listing, such as that shown in Fig. 18. Alternatively, a singl 25 column grid-like display could be used, as that shown in Fig. 25. In this format, the vertical y-axis identifies the channel number and service while the horizontal x-axis identifies the time. screen display of Fig. 18 also contains in the upper left-hand corner a mode identifier 180, in this case the notation "All 30 Listings," to remind the user of the current operating mode of the Directly underneath the mode display is a highlighted display 181 of the channel that the user was watching before entering the MENU mode. In the upper right-hand corner, a logo icon 182 appears in a window directly above a date/time identifier 35 183, which alternatively displays the current date and time.

In the center of the screen display shown in Fig. 18 is a graphical Activ K y Display (AKD) 184 which indicates to th us r those keys on the remote controller that are active for that particular mode of the program guide display system. For example,

in th scr n display of Fig. 18, the cursor can only move up, d wn r t the right. If the user were to depress the 1 ft direction arrow key n the remote c ntr ll r at that point, the system would not carry out any function since the cursor can not 5 move to the left. Thus, the left arrow key is not active so its image is not displayed on the AKD 184. Similarly, since the system will only respond to a depression of the up, down or right direction arrow keys and the ENTER key, they are the only key images displayed on the graphical AKD 184. The MODE key, though 10 not displayed, is always active to change from one mode to When the user first enters the All Listings guide, the another. time listing begins by default at the half-hour immediately preceding the current time unless the current time is on the hour or half-hour, in which case the display begins with the particular 15 hour or half-hour, and the channel listing begins at the last channel being viewed by the user before entering the MENU mode. For example, in Fig. 18, the current time is displayed as 7:13 p.m., the time listing begins at 7:00 p.m. and the channel listing begins with channel 4.

In the All Listings mode, a moveable highlighted cursor 185 is used to indicate the currently selected program to the user. The user manipulates cursor movement using the direction arrow keys on the remote controller 40. Furthermore, the entire information display pages upward if the cursor is placed at the 25 bottom of the screen and the down direction arrow is depressed, and similarly pages to the left if the cursor is at the extreme right side of the display and the right direction arrow is depressed. In this way, the user can navigate through the entire program schedule.

The folder icon 65B immediately to the right of the All Listings icon in the top horizontal bar 61 of Fig. 6 identifies a "Category Listing" mode in which program schedule information is displayed and categorized by program content, as shown in Fig. 19. The particular listing shown in Fig. 19 includes the categories of Movies, Sports, News and Children 190A-190D. The database record stored for each listing c ntains a c ntent-specific identifier so the microc ntroller can search the database and categorize th inf rmation by c ntent f r purposes f displaying it in the Category Listing m de. As sh wn in Fig. 19, the user can

manipulate the cursor left or right to highlight any ne of th categories which appear at the head of the listing. In Fig. 19, the "Movies" category 190A is selected. As shown, the user is given a display of all movies, prioritized by time and then 5 alphabetically by title of show, beginning with the half-hour immediately preceding the current time unless the current time is on the hour or half-hour, in which case the display begins with the particular hour or half-hour. The screen display shown in Fig. 19 also includes a textual description of the current 10 operating mode of the program schedule system, as well as the graphic AKD 184, similar to that used in connection with the All Listings mode.

As with the All Listings mode, if the user highlights a show which is currently airing, he can immediately tune to that show by 15 depressing the ENTER key on the remote controller 40. If the highlighted show is one that will appear at future time, the user is again given the option of setting a REMINDER message.

The triangular icon 65C at the far right of the TV GUIDE bar 61 in the display of Fig. 6 identifies a "Channel Listing" 20 mode in which the program schedule information is categorized and displayed by channel, as shown in Fig. 20. The screen display shown in Fig. 20 again includes a textual mode identifier 201, the graphic AKD 184, and the window including the logo icon 182 and alternating time/date display 183. At the head of the program 25 listing is a list of several consecutive channels 202A-202C beginning with the last channel viewed by the user before entering The channel in the middle window 202B the Channel Listing mode. is highlighted and is the channel for which schedule information is displayed. The display identifies those programs appearing on 30 the highlighted channel beginning with the half-hour immediately preceding the current time unless the current time is on the hour or half-hour, in which case the display begins with the particular hour or half-hour. The user can display further future listings by manipulating the cursor to the bottom of the screen and paging 35 the display, as previously described. The user can also change the s lected channel by manipulating the left or right direction arrow keys n the rem t contr ller 40. Wh n the user issues a change-channel command in this manner, the next consecutive channel will be displayed in the highlighted window 202B in the

channel string at the head of the display, and schedule information for the newly selected channel will be display don the television receiver 27.

As with other modes, if a user wishes to tune to a 5 highlighted program that is currently airing, he can do so by simply depressing the ENTER key on the remote controller 40, and if the user wishes to view a program that airs at a future time, the user is again given the option of setting a REMINDER message.

In each of the FLIP, BROWSE and MENU modes, a lower case 10 "i" icon appears at a number of occasions in connection with certain program listings, such as movies, such as the "i" 203 shown in Fig. 20. Any time this icon appears, the user can view additional programming information, generally comprising a textual description of program content and/or other information related to 15 the program, such as the names of cast members and the like, by depressing the "i" key 48 on the remote controller 40. An example of a display of such additional information is shown in Fig. 21.

The second horizontal bar 62 appearing on the screen in the MAIN MENU mode shown in Fig. 6 is the "Home Theater" Listing. 20 It corresponds to Pay-Per-View events or services, specialized programming, and Premium Service programs. When this category is chosen by the user, the television receiver displays information as shown in Fig. 15. The first theater-ticket icon 150 that appears in this Home Theater bar identifies a format in which the 25 Pay-Per-View events and premium services are displayed, as shown As with other modes, the user can manipulate the in Fig. 22. cursor to highlight and select any particular show. user can obtain additional information about the Pay-Per-View event or service by depressing the "i" key 48 on the remote 30 controller 40. The Pay-Per-View menu screen display shown in Fig. 22 also includes a video display section 220 in which short promotional clips of current and future events and services can be shown to the user while the user is viewing the Pay-Per-View scheduling information. The display of Fig. 22 is bit mapped such 35 that the advertising clips may be shown in the lower left quadrant of th screen. The clips may be shown randomly in th vide

display section 120 or, alternatively, the clip shown could correspond to the particular selected entry on the list of events,

and w uld change automatically as the user navigated through the list.

When a user highlights a Pay-Per-View event or service by manipulating the cursor to the desired event or service using 5 the direction arrow keys on the remote controller 40, he can order the event or service by depressing the ENTER button on the remot controller, thus linking schedule, promotional and ordering functions. If the user selects a particular Pay-Per-View event or service in this manner, the programming schedule system will next 10 present to the user a Pay-Per-View ordering screen such as that shown in Fig. 23. The display includes a figure representing the cost of the event or service. The display also asks the user to choose from among a plurality of scheduled airing times 230A-230C, as well as whether the user would like to see a REMINDER message 15 prior to the start of the Pay-Per-View event or service. The user responds to these inquiries by using the direction keys on the remote controller 40 to manipulate the cursor to the proper response and then depressing the ENTER key. After the user has ordered a Pay-Per-View event or service, the program schedule 20 system will present the user with two ordering confirmation submenus, such as shown in Figs. 24 and 24A. In either of these submenus, the user can confirm or cancel the Pay-Per-View event or service.

If the user confirms the order, the microcontroller 16
25 stores the Pay-Per-View ordering information in a location in memory. The ordering information can then be transmitted to the cable operator by the microcontroller 16 either by phone line or on the cable line where the system has two-way communication or other such interactive capability. Alternatively, a computer at 30 the cable operator location can interrogate the memory where the microcontroller stored the Pay-Per-View ordering information. At the appropriate time, the cable operator supplies the Pay-Per-View event or service and it is received by all users who have ordered the program.

The second icon 151 in the Pay-Per-View bar of Fig. 15 identifies a specialized broadcast, cable or satellite programming servic t which the user has access via th electronic program guide. In this mode, the electronic program guide application software acts to connect the user, through an appropriate data

transmissi n link, to the programming servic, at which point the us r interacts with the service. Alternatively, the electronic pr gram guide provides the navigati n softwar, including the menus and scheduling information, for the particular programming service. Such a service could be, for example, Your Choice TV ("YCTV"), a service offering reruns of highly rated broadcast and cable programs, in which case the icon may take a form suitable to identify YCTV. The programming available on YCTV is then supplied to the user via the programming guide system.

- 10 The last icon 152 appearing in the Pay-Per-View bar of Fig. 15 identifies a display format which lists all Premium Services offered by the cable operator, as shown in Fig. 26. this mode, the user can select for impulse ordering any one of the premium services by manipulating the cursor using the direction 15 arrow keys on the remote controller and depressing the ENTER key. Similar to Pay-Per-View ordering, the system will present the user with a series of ordering displays and, if a service is ordered by the user, it will confirm the user's request using another other If confirmed, the microcontroller 16 will store the submenu. 20 ordering information or transmit it directly to the cable operator. Once the order has been confirmed, the microcontroller can immediately allow the user access to the ordered premium In this manner, the user can order premium events or service. services on demand.
- If, during FLIP or BROWSE modes, a user views a channel 25 or schedule information for a service not subscribed to by the user, the microcontroller 16 causes an ordering submenu to appear instead of displaying a program signal along with the graphic overlay, as shown in Fig. 9. This submenu indicates to the user 30 that she does not currently subscribe to the selected service, and then asks the user if she would like to order the service. If the user responds affirmatively, the program schedule system takes the user to the ordering submenu discussed above. In this manner, the user can order premium events or services on impulse. 35 variations of this premium service ordering function are possible. For exampl , upon depressing th ENTER key whil the screen shown in Fig. 9 is displayed, the user may be pr sented with the pti n t ord r the selected service or a package of programming services that includes the selected service. This feature may be

implement d by r c iving and storing information identifying packags f pr gram s rvices in the DRAM 18. When the user d presses the ENTER key while the screen in Fig. 19 is display d, microcontroller 16 may then be programmed to check DRAM 18 to determine if the particular premium service is part of any package currently being offered and present the user with the option to purchase a programming package or the individual service.

The third horizontal bar 63 in the MENU mode shown in Fig. 6 is the "Messages" or "Customer Service" listing. As shown 10 in Fig. 16, the first envelope icon 160 represents messag information available from the cable operator. When the us r selects the message icon, he is presented with a screen display of currently available messages, as shown in Fig. 27. The display shown in Fig. 27 includes cable system messages 270 and billing 15 information 271. If the user selects the cable system messages option 270, she is presented with a message pertaining to th local cable operator, such as that shown in Fig. 28. If the user selects the billing status option 271 shown in Fig. 27, she is presented with a display of current billing information, such as 20 that shown in Fig. 29. This information may include a history of purchases charged to the user, current balance information, pending orders, and, an indication of available credit, which can be an authorized debit limit previously arranged with the cable or other operator. Thus, a user could specify only a certain pre-set Once the amount of charges from pay-per-view 25 spending limit. events reaches the limit, the microcontroller would not permit further ordering of events. An alternative messages menu is shown in Fig. 28A.

The next icon 161 in the Customer Service information 30 bar 63 of Fig. 16 identifies a "Viewer Preference" mode, which allows the user to create or revise a number of program schedule system operating parameters. Once selected, this display presents the user with several preference options concerning certain operating parameters of the program schedule system, as well as 35 the viewing of certain channels and/or certain content-specific pr gramming, f r example, th se shown in Fig. 7.

The first ption shown in Fig. 7 is the "Par ntal" pti n 70, which can also be expressed as a "Key Lock Access" opti n. Once this option is initially selected by the user, the

syst m displays a "K y Lock Access" submenu such as that sh wn in Fig. 30.

The Key Lock Access menu shown in Fig. 30 allows the user to control access to individual channels and programs or 5 events by requiring the user to enter an access code "key," consisting of a user-specified four digit code in the specific embodiment discussed herein, before ordering or viewing these pre-selected channels, programs or events. The menu display shown in Fig. 30 shows a series of subject categories that are entries 10 in the vertical y-axis selectable by the user. A particular subject category is chosen by using the up or down direction arrow keys on the remote controller 40 to highlight the desired entry. Once the user selects a particular subject category, the left and right arrow keys are used to navigate within the chosen category. The first subject entry shown in Fig. 15 "Parental Guidance" category 301. Once the user selects this category by manipulating the cursor to highlight the entry, the cursor can be then moved horizontally to an active window 302 which displays and selects one the five letter rating items in the 20 category. The letter items represent ratings of program content as follows: "V" for violence, "N" for nudity, "L" for language, "AS" for adult situations and "PD" for parental discretion. Once the user selects a particular item, such as "L", by moving to the active window 302 using the right direction arrow key, depressing 25 the ENTER key will indicate to the microcontroller 16 that a key lock access has been selected for programs rated with a "L" rating for violent or explicit language. The system indicates activation of a key lock access by displaying a key icon directly below the "L" category display. Once a key lock access is set, it can be 30 deactivated by selecting the category letter and then depressing the ENTER key. This action causes the key icon to disappear. The user can change the rating category in the active window 302 by using the left or right direction arrow keys on the remote controller 40, images of which are displayed on the screen 35 adjacent the active window as a reminder to the user. In this manner, the user can select ther rating categories for setting a key lock access f r any of th program c ntent identifi rs appearing in the Parental Guidance categ ry.

Th k y l ck access code itself consists of a four digit code, which the user can enter and m dify at any time. T d so, the us r highlights the fourth vertically selectable ntry "Change" Key Lock Access Code," 304 by manipulating the cursor to highlight 5 it using the direction arrow keys on the remote controller. highlighted, the user enters a new four digit code or revises th existing code and depresses the ENTER Th microcontroller 16 then identifies the new four digit key lock access code and stores it in memory. The user can clear the key 10 lock access code, as well as all other previously activated keys, by moving to the last entry in Fig. 30, "Clear Key Lock Access Code and All Keys," 305 which highlights the "OK" window, and then depressing the ENTER key. This action clears and deactivates all previously set keys, as well as the key lock access code.

The schedule information database record for each 15 program contains a field that corresponds to the program content identifiers in the Parental Guidance category. During operation, the microcontroller checks this field in response to a user command to tune to or order a program, or to display its 20 corresponding schedule information before carrying out the tuning, ordering or displaying function. If the parental guide identifier in the program schedule information database record matches any one of the activated parental guidance identifiers shown in Fig. 30, the user will be prompted to enter the four digit key lock 25 access code before the system takes any further action. entered code matches the key lock access code previously entered and stored by the user as described above, the system will carry out the user request to tune to the program, to order it, or to display its corresponding schedule information. If the code is 30 not recognized by the system, no further action will be taken and the user's request will be denied.

By manipulating the cursor using the direction arrow keys to highlight the second entry, "MPAA ratings," 308 the user can also set a key lock access for programs based on their MPAA 35 rating code, as also shown in Fig. 30.

As with the Parental Guidance categ ry, once th MPAA rating cat gory has be n selected, the user can move horizontally within the category to th active window 306 to s l ct one the five rating codes, i..., "G" for gen ral audiences, "PG" for

par ntal guidanc, "PG-13" for suggested parental guidance, no one under 13 admitted without an adult, "R" for restricted and "X" for x-rated. As with the Parental Guidance category, by selecting a particular rating --by using the left or right direction arrow 5 keys until the particular rating code appears in the active window--and then depressing the ENTER key, the user sets a key lock access for the rating, in which case a key icon appears below the rating code. And, as with the Parental Guidance category, once a key lock access is set, the system will prompt the user to 10 enter the four digit key lock access code anytime a request is made to tune to, order or display schedule information for a particular program having a rating code which matches a rating code for which key lock access has been activated.

The Key Lock Access mode also includes a subject 15 category 303 for controlling access to channels, which may be entitled, for example, "Channel Block" or "Channel Lock." with the Parental Guidance 301 and MPAA 308 categories, the user navigates to the Channel Block category 303 by manipulating the cursor using the direction arrow keys on the remote controller and 20 depressing the ENTER key. Once the Channel Block category 303 has been entered, the user can move horizontally to an active window 307, which in Fig. 30 indicates channel 2. Once the user highlights this window by manipulating the cursor using the direction arrow keys on the remote controller 40, a key lock 25 access can be set for the channel appearing in the active window. This is done, as with the other subject categories in the Key Lock Access mode, by depressing the ENTER key, which again causes a key icon to appear below the channel number in the active window. user can move to the prior channel or to the next channel in 30 sequence by depressing either the left or right direction arrow key on the remote controller 40. In this manner, the user can activate a key lock access for any available channel.

As with the Parental Guidance 301 and MPAA 308 categories, once a key lock access is set for a particular 35 channel, the system will prompt the user to input the key lock access c de pri r to carrying out an instruction to tune to or ord r that channel. If th input key l ck access code matches the pr vi usly st red access code, the user's instruction is carried out. Otherwise, the user's instruction is ignored. Thus, the

us r can contr l acc ss to the audio and vid o program c nt nt of any available channel. In this instance, the microc ntroller 16 will not all w audio or vide pr gram signals to pass to the VDG, but it will allow schedule information to appear for the channel.

is accomplished using a "Lockout" screen, as shown in Fig. 39. In addition to limiting access to programs based on the Parental Guidance, MPAA and channel criteria, as discussed above, access may be limited on the basis of program title. Fig. 39 shows an alternative Lockout screen 250 that can be used to permit or limit access to programs based on program title, in addition to the aforementioned criteria. Other parameters also may be included, such as time of day, day of week, credit limit, and content category (e.g., talk shows).

To enter the Lockout screen 250 shown in Fig. 39, the user must enter a multi-digit lockout code using the numeric digit keys 42 and the enter key 44 on the remote controller 40. The lockout code is set initially when the system is first used or installed. To set a lockout code in the first instance, the user 20 accesses a Setup screen 260, such as that shown in Fig. 40. Th Setup screen 260 will automatically appear the first time th electronic program guide is installed and initialized. For access during normal operation of the electronic program guide, a suitable access path to the Setup screen 260 may be provided, such 25 as from an appropriate icon in the MAIN MENU 215.

In the Setup screen 260 of Fig. 40, the user can navigate to the Lockout Code category 265 and set a new lockout code using the appropriate navigation and selection keys on the remote controller 40. A suitable menu for inputting the lockout 30 code is shown in Fig. 40A. Once enabled, the lockout code must b used to set or modify locks, to view a previously locked program, or to clear or change the lockout code. The memory location of the stored lockout code also should be remotely accessible, such as by the local cable company, in case the user forgets th 35 lockout code and it must be erased.

Once th lockout c de is entered and th Lockout screen 250 of Fig. 39 is displayed, navigation within the screen is controlled by the direction keys 43A and 43B on the rem te c ntroller 40. Using the up and down direction keys 43A to move

the selection curs r, eith r the M vie Rating 251, Parental Guidance 252, Chann 1 253, Locked Program 254 or Lockout C de 255 cat g ry can b select d. The left and right direction keys 43B are then used to navigate inside the selected category.

- Clearing a previously set lockout code is accomplished by moving the selection cursor to the "Clear" entry 256 in the Lockout Code category 255 and depressing the enter key 44 on the remote controller 40. This causes the microcontroller to clear the lockout code stored in memory, as well as all locks previously 10 set by the user. To change the current lockout code, the user navigates to the "Change" entry 257 in the Lockout Code category 255 and depresses the enter key 44 on the remote controller 40. The user is then prompted to enter a new lockout code, which is subsequently stored in memory by the microcontroller.
- To set a lock in either the Movie Rating 251 or Parental 15 Guidance 252 category, the user navigates to the selected entry in Fig. 39 by manipulating the selection cursor using the direction keys 43A and 43B on the remote controller 40, and then depresses a lockout key on the remote controller, such as the padlock key 20 45A shown in Fig. 4. The microcontroller will appropriately modify the display to indicate that a lock has been set, for example, by changing the color of the text or the background in the selected entry window, or by displaying an appropriate icon next to the text in the selected entry window. In Fig. 39, a 25 padlock icon 258 appears in the window of the "PG" entry in the Movie Rating category 251. Toggling the lockout key while the selection cursor is positioned on a selected entry will alternately enable and disable the lockout function for that entry.
- Similarly, to set a lock for a particular channel, the user selects the channel using the selection cursor and then depresses the lockout key. In Fig. 39, the channel "4 KCNC" entry in the Channel category 253 has been locked, which is indicated by the inverse video and padlock icon appearing in the window.
- Program locks also may be set by title, which can be effected in several ways. For example, when the above-described FLIP or BROWSE mode of the electr nic pr gram guide is enabled, th reby causing the title of a program to be displayed along with oth r pr gram schedule inf rmation in a window superimposed on the

actual program signal th n b ing r ceiv d, the user can limit the program c rresponding to the displayed pr gram information by d pr ssing the lockout key 45A on the remote controller 40. The user also may limit access to the currently 5 tuned program by depressing the lockout key 45A on the remote controller 40 while viewing the program, regardless whether the FLIP or BROWSE modes are enabled. In this instance, microcontroller first removes the program signal from the display and then accesses the schedule information database record for the 10 program then appearing and sets an appropriate flag to indicate the program has been locked. Also, when viewing program schedule information in the grid or category listings, as discussed above and shown, for example, in Figs. 18-20, the user also can tag a program for lockout by highlighting it with the selection cursor 15 and then depressing the lockout key 45A on the remote controller

In each of these instances, the microcontroller then stores the program title in a lockout title list stored in memory along with any other titles that previously have been locked out 20 by the user. Individual items in the lockout title list are displayed in alphabetical order in the "Locked Program" window 259 shown in Fig. 39, and the user may scroll through the list by positioning the selection cursor on the Locked Program window 259 using the up and down direction keys 43A on the remote controller 25 in Fig. 40 and then using the left and right direction keys 43B to scroll through the list one item at a time. In order to sav memory space, alternatively, the microcontroller may be programmed to set a flag or otherwise mark the particular database record containing the program schedule information for the program that 30 is to be locked out, and to thereafter access the database to retrieve the title information when it is to be displayed, such as when the viewer is reviewing the lockout title list in the Locked Program window 259.

40.

Once an individual title has been locked out, the 35 microcontroller can be programmed optionally to display an appropriate 1 ckout icon, such as a padlock, whenev r program schedule inf rmation for the locked program is to be displayed, such as in the window verlay of the FLIP or BROWSE m de, or in the vari us grid and category displays available in th MAIN MENU

displays. The system also may display an appropriate text message if some neatries to access the program signal of a previously-licked program. Of clurse, once a program is locked, in all instances the microcontroller prevents access to the actual program signal (including both the audio and video portions of the program signal) until an appropriate code is entered or the lockout is removed.

Several methods can be used to block programs at their time of airing. For example, in the case of the Movie Rating, 10 Parental Guidance and Channel categories, the schedule information database record for each program is provided with a field that corresponds to the rating, program content identifier or channel appearing, respectively, in the Movie Rating 251, Parental Guidance 256 and Channel 253 category of the Lockout screen 250 shown in Fig. 39.

During operation, the microcontroller checks the appropriate field in the database record in response to a user command to tune to or order a program before carrying out the tuning or ordering function. Additionally, the lockout code also may be used to restrict access to program schedule information. In this instance, the microcontroller also would check the appropriate field in the schedule information database record before displaying schedule information for a program.

If the movie rating, parental guidance or channel 25 identifier in the program schedule information database record matches any one of the locked-out_entries_indicated in the Lockoutscreen 250, a Lockout Verify screen 300 is displayed in overlaying relationship with the video signal then being displayed on the television receiver, as shown in Fig. 41. The user will be 30 prompted to enter the previously set lockout code before the system takes any further action. As an added security measure, asterisks will be displayed as the user enters the lockout code. If the entered code matches the lockout code previously entered and stored by the user as described above, the system will carry 35 out the user request to tune to or order the program, or to display its c rresp nding schedule information. If the cd not rec gniz d by the syst m, no furth r acti n will be tak n and the user's request will be denied. In this case, the Lockout Verify screen 300 will remain displayed on the televisi n receiver

waiting for a correct code to be entered. If no action is taken by the us r, the Lockout Verify screen 300 will be r mov d after a pred t rmined time-out peri d, such as ne or two minutes.

Similarly, in the case of lockout by title, the 5 microcontroller also could check the title field in the schedule information database record and compare it with the list of program titles for which the user previously set a lock. If, as described above, the microcontroller does not maintain a list of the actual titles of programs locked by title, a suitable 10 identifier can be set in a field in the database record to indicate that a program has been locked by title when the user first sets the lock, and, thereafter, the microcontroller could check that field in response to a user request to tune to or order a program, or display schedule information.

15 An alternative method for effecting lockout involves the use of a portion of the real-time program signal being received by the television receiver. With this method, codes corresponding to a program's rating, parental guidance category, title or chann l are inserted into and transmitted along with the program signal, 20 such as in the vertical or horizontal blanking intervals, or on raster scan lines that are not visible on the television receiver. When the program signal is received, these codes are stripped from the program signal and stored in memory. Methods and apparatus for the insertion transmission and reception of digital codes 25 carried on a program signal are known in the art.

After the transmitted codes have been separated from the program signal and stored in memory, the microcontroller can compare them with the lockout criteria set by the user in the Lockout screen and take appropriate action, as described above.

The Setup screen 260 shown in Fig. 40 also contains a Purchase Code category 270, which allows the user to set a numeric purchase code that must be entered before any premium channels or pay-per-view programs can be ordered. The Setup screen 260 shown in Fig. 40 includes entries for setting a new purchase code and 35 for clearing or changing a previously set password. Appropriate menus for s tting, confirming, clearing or changing the purchase code are shewn in Figs. 40B through 40E. Once a user sets a purchase code, the microc ntroller the reafter will display a purchase Code V rify screen in response to a user request to tune

to or order a premium s rvices channel or pay-per-view program. The Purchase Code Verify screen works in a manner similar to the Lock ut Verify screen 300 in that the user is prompted to ent restricted the previously set purchase code password before the microcontroller will tune to or order the requested program. If the correct purchase code is not entered, the microcontroller will take no further action and the Purchase Code Verify screen will remain displayed waiting for input of the correct code. If no action is taken within a predetermined time-out period, the 10 Purchase Code Verify screen will be removed.

The next option shown in Fig. 7 is the Channel Preference or "Favorite Channel" list option 71. By highlighting this icon and depressing the ENTER key on the remote controller 40, the user is presented with a submenu on the screen such as 15 that shown in Fig. 8.

In normal operation, the program guide system presents channels to the user in numerical order in response to an up or down change-channel command issued by the user using one of the direction arrow keys on the remote controller. The channel number presentation sequence includes all channels offered by the cable company in the order of which they are modulated onto the channel by the operator.

The program guide system also provides the capability of selecting from among several user-defined channel presentation 25 sequences, which are activated using one of the three "check mark" icon keys 48A, 48B or 48C on the remote controller 40 shown in Fig. 4. Each of these keys represents a preferred particular list of channels which a particular user selects and which the microcontroller stores in memory as a "Channel Preference" list, 30 as discussed in detail below. To activate one of these preferred channel lists, the user depresses the corresponding check-mark icon key, in which case the microcontroller may display the chosen icon on the screen in the graphic overlays and full screen displays to remind the user that a particular channel preference 35 list is being used by the system. Once a preference list is activated, the system will limit the tuning of the televisi n rec iver and the display of schedul information only to those channels that are designated in the activated vi wer pref rence list.

To revise the content and/r sequential rder of the chann ls in the Channel Preference list, the user enters the MENU mode f th programming guid system. To enter the MENU mode from the FLIP mode, the user twice depresses the MODE key 38 when using the remote controller 31 of Fig. 3. To enter the MENU mode when using the alternative embodiment of the remote controller 40 of Fig. 4, the user simply depresses the MENU icon key 47B.

When first entered, the MENU mode has a screen display such as shown in Fig. 6. To select the submenu for editing th 10 Channel Preference list, the user first selects the third horizontal bar 63, which can be titled, for example, "Messages" or "Customer Service," by manipulating the cursor using the down direction arrow key, as shown in Fig. 7. The screen of Fig. 6A is The user then selects the second icon 161 thereby displayed. 15 appearing in that bar, indicated with a check mark, which corresponds to a "Viewer Preference" mode, by highlighting the icon using the direction arrow keys and again depressing the ENTER key. This action will cause the microcontroller 16 to display a Viewer Preference submenu such as that shown in Fig. 7. 20 selecting the Channel Preference or "Favorite Channel" entry 71, the user enters the Channel Preference submenu, shown in Fig. 8. If the user has not already done so, he would then depress the particular check-mark icon key on the remote controller 40 of Fig. 4 to create or revise the particular channel preference list.

In the Channel Preference menu shown in Fig. 8, a list 80 of all channels available on the particular cable system is displayed on the left side of the television receiver screen, labeled "Choices" in Fig. 8, and the viewer's preferred list 81, designated "Selected" in Fig. 8, is displayed on the right side.

30 If a particular code, such as an END or "-1" symbol appears in the first (uppermost) position 82 of the viewer preference list 81, the system displays information for all channels in numerical order in all modes of operation. This is the default mode of the system.

By selecting channels in sequence from the available list 80 and placing them in the desired rder in the preference list 81, the user can s lect a subs t of channels and/r rearrange the default sequence in resp nse t a channel up or channel d wn command from the user. This is accomplished by highlighting a

channel in the available list 80 using the up and down direction arr we keys on the remote controller 40 and depressing the ENTER k y 44, which stress the ontry temporarily in a buffer.

The microcontroller 16 stores a list of all channels 5 previously entered in the viewer preference list 81. particular channel is highlighted by the user when navigating through the available channel list 80 displayed on the left side of the television screen, a window 84 appears adjacent to the particular channel highlighted by the user. If the particular 10 channel already appears in the viewer preference list 81, the system displays a "DELETE" message in the window 84 as a reminder that the channel was previously selected from the available channel list 80 and can only be deleted from the list 81, which is accomplished by depressing the ENTER key 44. If the particular 15 highlighted channel in the list 80 was not previously selected, the system displays a "SELECT" message in the window 84 as a reminder that the particular channel will be selected for addition to the viewer preference list 81 if the user depresses the ENTER key 44. The microcontroller 16 inserts a selected channel at the 20 bottom of the list 81. In this manner, the user can select or delete channels from the viewer preference list in any desired order.

The available channel list 80 may also be provided with categorical entries 83, such as movies, news, sports or children's 25 shows. The user may also highlight any of these entries and put them into the viewer preference list 81. If the user does include a category in his viewer preference list 81, when the user issues channel up or down commands, the system will display, in sequence, first the user's selected preferred channels in numerical order 30 and then all channels having a program whose content corresponds to the selected category or categories at the time.

Once the user has revised the channel preference list 81 in the described manner, the microcontroller 16 will follow the stored user-specified channel sequence in response to a change35 channel command made by the user employing one of the direction arrow keys. To activate the viewer preference list, the user d press s n of the three check-mark ic n keys 48A, 48B or 48C on the t p of the r m te c ntr ll r shown in Fig. 4. The viewer preference list can be used t sel ctively limit tuning of the

television r c iv r r display f schedule information in any of p rating m des of the electr nic program guide. present embodim nt, once a pr f rence list is activated, the system will limit the tuning of the television receiver and the 5 display of schedule information in the FLIP, and BROWSE modes, as well as in the grid category and channel listings in the MENU mode, only to those channels designated in the activated viewer preference list. The tuner can not be tuned to, and no corresponding schedule information can be displayed for, any 10 channel not entered in the viewer preference list when it is activated. In this regard, it should be noted that setting a key lock access in the Parental Guidance 301, MPAA 308 or Channel Block 303 categories produces a different result than when using other display criteria, such as the Channel Preference List of 15 preferred channels discussed above. Thus, while a key lock access will prevent audio and video program information, but not schedule information, from being displayed or ordered absent entry of an authorization code, if a particular channel is included in the Channel Preference list and also has a key lock access activated 20 in the Channel Block category 303 of the Key Lock Access mode, that channel or its corresponding schedule information will not be displayed at any time.

To deactivate a previously selected viewer preferenc list, the user toggles the appropriate check-mark icon key on the 25 remote controller 40 of Fig. 4. Once deactivated, the system defaults to displaying and tuning all available channels, as well as displaying schedule information for all available channels.

Alternatively, the viewer preference list 81, if activated, can be used to control tuning and display of schedule 30 information only in selected modes, such as only in the FLIP mode, thus allowing the user to tune and view corresponding schedule information only for those channels entered in the preference list 81 in the FLIP mode, while viewing all channels and corresponding schedule information in all other modes.

In this latter configuration, as well as in the instance wher no channel pr ference list is activat d and the system is in d fault m d , if a channel appears in the viewer preference list 81 that corresponds t a service not subscrib d t by the us r, the microcontroller 16 causes an ordering submenu to appear

instead of displaying a pr gram signal along with the graphic overlay, as shown in Fig. 9. This submenu indicates the user that he does not currently subscribe to the selected service, and then asks the user if he would like to order the service. If the user responds affirmatively, the program schedule system takes the user to another ordering submenu to confirm the user's request, as with impulse ordering.

The program guide also may be configured with a Locator screen 201, as shown in Fig. 37, which aids the viewer in channel 10 selection and definition of a favorite channel list. The Locator screen 201 displays all available channel numbers grouped according to the source of the program information appearing on any particular channel at any particular time, e.g., broadcast, cablecast, pay-per-view, near video on demand, satellite, or other 15 source of program material. Thus, the Locator screen 101 can be used to locate any particular channel or service because the groupings provide a quick and efficient method for scrolling through the list of available channels. The channel numbers also may be grouped according to other criteria, such as program 20 category, program content, program rating or other content-based standard, time of availability, numerical order, or other logical grouping.

In the example shown in Fig. 37, the user navigates within the Locator screen 201 using the direction keys 43A and 43B 25 on the remote controller 40. The right and left direction keys 43B move the selection cursor within the category rows, while the up and down direction keys 43A are used to select a particular category. From the Locator screen 201, any particular channel can be selected for viewing by positioning the selection cursor on the 30 desired channel and depressing either the enter key 44 or an optional tune key (not shown) on the remote controller 40.

In addition to aiding in channel selection, the Locator screen 201 also provides the user with the ability to conveniently define favorite channel lists. To do so, the user first moves the 35 selection cursor to the desired channel by using the direction keys 43A and 43B or numeric digit keys 42 on th remote controller 40, and then depresses a fav rite chann 1 k y 46A provided n the remot controller 40, which causes the display to change in some mann r r charact ristic as an indication that the channel has

b en s l cted as a favorit chann l, such as by changing the c lor of the channel identification text or the text background, by displaying an appr priat icon r by s me ther appropriate identification scheme. In the remote controller 40 shown in Fig. 5 4, the pound key "#" can function as the favorite channel key.

Also, if multiple favorite channel lists are being used, the user would depress the appropriate favorite channel key on the remote controller to select a particular list before depressing the favorite channel key. For example, as discussed above, the 10 remote controller 40 shown in Fig. 4, has three color-coded checkmark favorite channel keys 48A, 48B and 48C, which provide for at least three individual favorite channel lists for three individual Different identification characteristics displayed on the Locator screen 201 to indicate that a particular 15 favorite channel list is selected. For example, the icon or image used to enable a favorite channel list on the remote controller, such as the check mark key 48A used on the remote controller 40 shown in Fig. 4, could be displayed on the Locator screen 201, as well as other screens of the program guide, when a favorit Alternatively, the color of the 20 channel list is enabled. displayed text or background could be changed to match the color of the selected favorite channel key.

The Locator screen 201 may be accessed via several For example, it may be included as a virtual channel that 25 is conveniently positioned in the channel-tuning sequence, such as between the highest and lowest available channel numbers -- for example, a virtual channel 0. To the user, such a virtual channel appears to be a conventional channel. However, it requires no additional bandwidth as a carrier. For example, it can be 30 digitally produced at the subscriber station or included in an appropriate blanking interval in existing bandwidth frequencies. In this manner, the virtual channel is accessible either by entering the corresponding channel number using the numeric digit keys 42 on the remote controller, or by using the up and down 35 direction keys 43A to wrap around from the highest to the lowest channel number, or vic v rsa. As shown in Fig. 38, it also may be desirable to provide a suitabl id ntifier, such as an ic n r text message 210, in the MAIN MENU display 215, from which the user could access the Locator screen 201 simply by highlighting th id ntifi r 210 with the selection curs r and depressing the ent r k y 44 n the remote c ntr 11 r 40. Alternatively, th remote controller may be provided with a key corresponding to the Locator screen 201 which would cause the microcontroller to 5 display the Locator screen 201 when the user depressed it.

In addition to Channel Preference or Favorite Channel keys, the remote controller 40 can also be supplied with a number of user-activated category preference icon keys, e.g., movies, sports, or children's programming. The system can be adapted to 10 present to the user only those programs meeting particular preference category when it is activated by the user. As with the Channel Preference icons, the microcontroller may display the icon corresponding to the activated preference category to remind the user of the currently activated mode of system operation.

The question mark icon 162 at the far right of the third horizontal bar in the menu of Fig. 16 identifies a program guide system "Help" mode in which information explaining the operation of the system is displayed for the user. Again, by manipulating the cursor using the appropriate keys on the remote controller, the user can select this mode. Once selected, the next submenu appearing in the Help mode asks the user to identify the particular portion of the system about which the user would like to view Help information.

The icons appearing in the last horizontal bar of the 25 MENU mode identify certain interactive and/or other types of information services which the programming system, acting as a gateway, makes available to the user as shown in Fig. 17. By manipulating the cursor, the user can select any one of the identified services, as shown in Figs. 31-35.

For example, if the user initially selects the "X*PRESS" icon appearing in the last horizontal bar, he is presented with a submenu such as that shown in Fig. 31. Using the direction arrow and enter keys on the remote controller, the user selects one of the three entries appearing in the display of Fig. 31. Once a particular entry is selected, the electronic program guide conn cts the user to the sel cted service and pass s control to the particular s rvice application s ftware, as shown in Figs. 32-35.

Alternatively, the r mote c ntroller 40 can b supplied with a plurality f c ntent-specific keys c rresponding to a plurality f cont nt-sp cific categ ries of programming, .g., a Sports key, News key, Movie key, etc. When the user depresses a 5 content-specific key, a content-specific mode is initiated. In Fig. 4, the remote controller is equipped with a Sports key 49. If the user depresses the Sports key 49, the microcontroller will limit the display of programs and/or program schedule information to those that are sports-related. The microcontroller will block 10 all other programming or schedule information from appearing on the television receiver. The microcontroller can be adapted to distinguish programs and schedule information that are sports-related by examining an appropriate code associated with the program or schedule information.

As discussed above, coding can be accomplished using any 15 number of methods, such as by including an appropriate code in the vertical blanking interval of the program signal, or in an appropriate memory location in the database record of the program schedule information, or if the schedule information is being 20 received on a broadband network, by including it in an appropriate blanking interval. The user activates a content-specific mode by depressing the appropriate content-specific key in any mode of operation of the electronic programming guide, including the aforedescribed FLIP, BROWSE or MAIN MENU modes, as well as when no 25 schedule information is being displayed and only a program signal is visible on the television receiver. Once a content-specific mode is requested by the user, the microcontroller immediately and directly enables the content-specific programming criteria, and maintains it for all operating modes of the guide until disabled, 30 which can be accomplished, for example, by toggling the Sports key 49.

Instead of a dedicated content-specific key, such as Sports key 49, the system may be configured with a single, generic content-specific key, which, when activated, would cause the microcontroller to display a content-specific menu containing a list of all cont nt-specific categories available to the user. The user then could highlight a particular cat gory by manipulating the selection cursor using the direction arrow keys not the remote controller and select it by depressing the ENTER or

OK key 44. As an alt rnative to using a c ntent-specific key on the remote c ntroller, access to the cont nt-specific m nu can b effected by pr viding an appropriat identifier in another menu screen of the electronic guide, such as in the LOCATOR, SETUP or 5 MAIN MENU screens.

In addition to blocking all non-selected contentspecific programming when a particular content-specific category has been selected, the microcontroller can be programmed to enable all added-value programming or services that are specially related 10 to the selected content-specific category. For example, if the activates a Sports content-specific mode, the microcontroller, in addition to allowing only sports programming or schedule information related to sports programming to be displayed, will proactively seek out and enable all sports related 15 added-value services, such as related trivia or video games, up-to-date scores while a game is in progress, team schedules, replays of prior games of the selected teams or players, ticket or souvenir purchasing, etc. Thus, the information available from the programming or service can be integrated into the environment 20 of the electronic program guide. Rather than simply passing control to another service as described above, in this manner the electronic program guide would function as a system integrator or interface to combine the available added-value information into a package within the electronic guide environment, thus essentially 25 creating a series of modular electronic program applications corresponding to a variety of available content-specific categories.

The Setup screen shown in Fig. 40 also includes a Text Location category 275, which contains the textual entries "Bottom 30 of Screen" and "Top of Screen." By navigating to the Text Location category 275 using the up and down direction keys 43A on the remote controller 40, and to either the "Top" or "Bottom" entries in that category using the left and right direction keys 43B on the remote controller, and then depressing the enter or 35 select key 44, the user can control the position of the overlay windows used t display information in vari us operating modes of the el ctronic program guide. The Setup screen of Fig. 40 provid s the user with two p sitional ch ices: the t p r b ttom of the scre n. Depending on the modes of operation of the program

guid, it may be desirable t provide the user with more positional choices in viewing area f the television rec iver, r to provide the user with the ability to choos a different position for information displayed different operating modes.

one of the novel features of the disclosed invention is the textfit system. The preferred embodiment of the text fit system includes an interactive computer program used to edit the program listings data before it is transmitted to the user and stored in memory. The interactive system operates as follows: unedited (or partially edited) program listings information is loaded into data a processor. The data includes program titles, program schedule times, duration, category, as well as additional descriptive information dependent on the type of program. For example, for movies the data includes the MPAA rating, year of the movie, whether it is in black and white, and a list of starring actors and actresses.

The data processor extracts only the program title data which includes television program titles as well as movie titles, sporting events and titles for other special events. Based on the 20 duration of the program, the data processor first analyzes the listings data to determine what grid size listings are needed for each title. Thus, a two hour movie could require four different edited titles to fit into each of the four different size grid cells (30, 60, 90, 120 minutes). The data processor then 25 determines how much space is required to display the title based on its character length. If the title is to be displayed in the program schedule grid using a proportional font and character to character kerning, the data processor may also account for these factors in determining the space required to display a title. 30 determination would than be based on the number of pixels required for the particular combination of characters in the title. amount of space available for display of a title depends on th size of the grid cell and the space required for display of icons, when activated.

If the data processor determines that a full title r quires to much space t fit into one or more grid cells, the titl is then presented to the editor using a suitable display device c nnected to th data pr cess r, such as a CRT. The editor is then queried to alter the title s that it will fit in the

allott d space. If the title must b edited f r more than ne cell siz, the editor is queri d to edit ach of thes separately. In the preferred embodiment of the interactive program, the editor is shown in real time whether the edited title will fit in the 5 designated grid cell.

In the preferred embodiment, two lines of text are displayed in each grid cell of the program listings. The title, as edited, appears on the first line, and if necessary, continues onto the second line. The decision to wrap-around to the second line is based on whether natural breaks exist in the title such as spaces between words, commas, periods, hyphens, etc. These are standard techniques used in word processing software routines. The editor may also be queried to edit a title in the situation where the full title will fit on the allotted two lines, but a 15 hyphen is required because there are no natural breaks in the title.

Prior to querying the editor to shorten a title, the data processor compares the title with a stored library of shortened titles to determine if the title had previously been 20 shortened while editing another listings database. Each time changes are made by the editor to a title, the shortened title is added to the library. It is apparent that this process of building a library of shortened titles greatly reduces the manual input required.

- A flow chart illustrating the process by which the text fit system operates is shown in Fig. 42. The chart illustrates the operation of editing a listing for display in a program grid for a single platform, but operation is the same for all platforms.
- 30 Text editing may be necessary in other situations besides that where multiple size grid cells are used for display of the same title. For example, the disclosed program guide may run on several different platforms, with each one having different constraints and grid cell space availability. Some may not 35 display the text in proportional fonts and some may have other limitations reducing the available space. Thus, in the preferred embodim nt the interactiv program will request edits for all platforms for which they required at the same time. In addition, editing of text may be required for display mides the right than a

grid of pr gram listings. Fr exampl, in the "Listings by chann 1" display of fig. 20, programs are listed on an entire, fixed-1 ngth lin, but the length f the lin may vary from platform to platform, so that the text fit system may be employed 5 for the purpose of editing listings for the different platforms in this display mode as well. The space available for the display of text will also depend on how much space is reserved for icon display. The same process as that shown in fig. 42 would apply, except that there would be no need to determine what grid sizes 10 are needed because a fixed length line is used for display rather than multiple sized grid cells.

It will be apparent to those of skill in the art that the disclosed text fit system has applications beyond that of title editing alone. The system may be easily modified to provide 15 editing of messages, "i" screen storylines, pay-per-view promotional copy, and similar text messages so that they will fit into the designated space available for display of the text. In fact, the system may be used to edit any text for display in th disclosed program schedule system.

The computer program for the microcontroller 16 may also 20 include a schedule for the display of varying background views upon which the program schedule information is overlaid either partially or in a full screen display. The background views may be stored as bit maps in memory or in another storage medium, such 25 as an optical storage device. For example, the microcontroller 16 may be programmed to issue a command to the VDG every morning at 6:00 AM to display a sunrise in the background. The background may then be changed accordingly throughout the day to, for example, a blue sky or a nighttime view. It also may vary, e.g., 30 by time of day, day of week, month, year or season. background also could change depending on the particular category of programming that the user is watching or to which selected schedule information pertains. The mood background also may be adapted to display scenes that reflect the particular viewing area 35 in which the user is situated, like the Rocky Mountains, or Mt. Rainier, tc. It also may b p ssible to display standard scenes, such as an ocean r for st sc ne. Moreover, the audi background als could b adjusted t r late to the particular mood background then being displayed. In addition, different background views may

be used for holidays and special ev nts, such as Christmas, Fourth of July, Sup rbowl Sunday, etc. The purpos of the background views is to help eas the mon tony f viewing program listings. The microcontroller 16 could be adapted automatically to 5 coordinate the display of the mood background. The user also could be given the ability to choose from among various mood background displays by adapting the microcontroller to display an appropriate mood option menu that lists the mood background options available to the user and allows the user to select one or 10 more by manipulating the selection cursor. Access to such a mood option menu could be achieved by supplying an appropriate identifier, textual or visual, in an appropriate menu of the system, such as the LOCATOR or SETUP screen.

Additionally, the electronic program guide could be configured to store a unique digital identifier for each program along with its schedule information and later use the identifier - e.g., by transmitting it -- to indicate to a recording or storage device, such as a video recorder, that the user wishes to record the program. The program guide could also use the identifier to automatically control operation of the video recorder. The electronic program guide could also be configured to use other stored schedule information for this purpose.

Operation of the interactive home shopping feature of the present invention may be explained with reference to Fig. 43. 25 Fig. 43a illustrates a "by time" screen of the EPG listing the different programs scheduled to air at a particular time on the different channels. As shown in Fig. 43a, certain listings are provided with an asterisk or "star" icon 401 indicating that a product or service associated with each of the listings is 30 available and may be ordered remotely by the user. The remote control unit 40 discussed above may be further configured with a star button used to order products and services. Alternatively, the existing star key on the keypad 42 may be used. particular icon used to designate that the indicated listing has 35 an associated product or service available for purchase is not part of the invention -- any convenient symbol may be used.

Th scr en sh wn in Fig. 43a indicates that two listings, "Full Metal Jacket," and "B verly Hills Cop III," includ ass ciat d products or servic s. Upon depressing th star

button on the remote contr 1 whil the cursor is highlighting the program listing for "Full Metal Jacket," the format selection screen sh wn in Fig. 43b is displayed. This scre n informs the user of the particular product or service available and the 5 various options and/or formats available, as well as the price f the different options and formats. As shown in Fig. 43b, the left and right arrow buttons 43B on the remote control unit 40 are used to scroll throughout the different formats. As the user scrolls. the price displayed automatically changes to reflect the price for 10 the currently selected format. Upon selection of the particular product format (by depressing the "OK" or enter key 44 on the remote control unit 40), i.e., a VHS format cassette, the user is presented with the screen shown in Fig. 43c to select the payment method and method of shipment. The user may scroll through the 15 different payment methods which may include various credit cards as well as the option to add the purchase price to the user's bill for program services. At the bottom of the screen, the user enters his credit card number and expiration date. also scroll through various methods of shipment, and the total 20 price changes accordingly based on the different shipment methods. Upon selection of the payment and shipment methods, the user is presented with the screen in Fig. 43d to review and confirm the A purchase code may be used to prevent unauthorized

The screen in Fig. 43d may be used where the user has previously entered his address and phone number. The user may have previously entered this information in advance using a set-up 30 screen to input all the necessary information upon first use of the product ordering service. The setup information may also include one or more credit card numbers so that when a product is ordered, the user need only select a credit card from a list previously entered. Alternatively, the user's address and phone 35 number may be extracted from the program services billing system.

persons from ordering products or services as shown in Fig. 43e. 25 The purchase code may be selected in advance in the same manner as

program lock-out code discussed above.

The star icon may also be used to indicate that more than one product reservice associated with the television program is available. Fig. 44 illustrates one embodiment of a screen that may be presented to the user upon depressing the star button while

th cursor is highlighting th program "48 Hours." As shown in Fig. 44, both a transcript and tape (VHS r Beta format) are availabl. Using the arr w butt ns 43B on th rem te control unit 40, the user highlights the desired product and depresses the "OK" 5 button to order the product.

Products and services may be ordered from any of the different modes of the EPG by including the star icon in the program schedule display in each of the different modes of the system. Fig. 45 illustrates use of the star icon in connection 10 with the flip mode of the system discussed above.

There are many potential applications for this type of product ordering service. In addition to ordering a videocassette or transcript of a program, various ancillary products may similarly be ordered, such as tee shirts and other apparel, books, 15 movie soundtracks, toys, etc. The disclosed product ordering system is especially useful in conjunction with programs that are copy-protected, such as PPV movies. These programs cannot be recorded using a VCR so that the disclosed product ordering service presents a powerful marketing tool and permits users to 20 order their own, professionally produced, licensed copy of, e.g., a PPV movie simply by depressing a button on their remote control One example of a service that can be provided is the ordering of tickets for television programs with live audiences. Program listings for such programs as game shows and talk shows 25 could utilize the star icon to order audience or participant tickets for the show. The star icon may also be used with the program listings for local sporting events to order tickets for the listed event as well as future events.

The use of the disclosed product and service ordering 30 capability need not be limited to television programs. For example, if the cable system operator or other program provider provides music as well as television channels, products and services associated with music programs may also be ordered through the guide. Fig. 46 illustrates one embodiment of a screen 35 that may be used for ordering a product or service associated with a music program. Products that may be ordered include a CD r cass tt tape of the s ng or album. The rdering service may also be used t rder tickets to an upc ming concert f the artist that performs the selected music program.

The use f the EPG thus presents a new v hicle for mark ting program-relat d products and services capable of reaching a very large audience, including these whe would not normally tune to existing home shopping channels.

Product and service ordering may be readily implemented 5 in the EPG of the present invention. The different display that comprise the EPG are controlled screens microcontroller 16, which accesses the program listings data f r each of the programs. If the data indicates that a product r 10 service associated with a particular program is available, the microcontroller 16 will display the star icon whenever the particular program listing is displayed in the different modes of The microcontroller 16 also controls the display of user-selected options in the EPG so that when a particular listing 15 is highlighted by the user, the microcontroller 16 displays appropriate ordering information when the user depresses the star key on the remote control unit 40 so that correct product or service information is displayed.

The ordering of services is discussed above in 20 connection with Fig. 9 regarding the ordering of premium services and pay-per-view events. Products may be ordered in a similar manner using either a telephone line, coaxial cable, optical fiber, or wireless transmission as the return path for placing user orders. There are many techniques known in the art that may 25 be used for providing information on products and services ordered by a subscriber to a cable television service at a remote location for processing at a central location. For example, the same techniques used for billing subscribers for pay-per-view events may be applied to product ordering as well. In one embodiment, 30 the microcontroller 16 stores subscriber orders in memory for subsequent transmission using the subscriber's telephone lines. The microcontroller 16 is programmed to dial the central ordering location to place subscriber orders. Typically, a toll free "800" number is utilized for this purpose and calls are placed at times 35 when the subscriber is not likely to be using the telephone. 16 may be programmed so that orders microc ntroll r accumulated thr ughout th day and a call is placed nce per day t transmit all the accumulat d rd rs.

Another possible techniqu for placing rders is to us
th cable itself. This t chniqu may b used in both ne-way and
two-way cable plants. In a one-way cable plant system, orders may
be stored at the user location in a set-top box provided by a
5 local cable system. The set-top box may then be polled by the
cable headend using techniques known in the art to determine if
any orders are stored for transmission to the cable headend. If
orders are present, they are provided to the cable headend for
processing.

A two-way cable plant is most advantageous if real-time ordering capability is desired. Using the return channel, orders may be placed and immediately transmitted upstream to the cable headend where they can be processed or forwarded to a separate processing center. In this manner, orders may readily be 15 processed the same day and shipped to the user via overnight courier.

Another possible technique is to control the call-in of orders from subscribers from the central location. For example, the cable headend could poll the subscribers and program the set20 top boxes to call the central location at a particular time so as to stagger the call-in times and avoid overloading the processing center. Finally, it is also possible for the cable headend to connect to each user's set top box via telephone lines and call-out to each viewer sequentially to determine if any orders are pending.

It is also possible to maintain the product ordering feature entirely separate from the cable system or other program provider operations. The entity providing the EPG may maintain its own processing equipment at the cable system headend or other program provider location so as to receive order requests directly from users without the need for any pre-processing by the cable headend. User requests identified as product orders may then be diverted directly to the EPG provider's processing equipment. This type of system architecture allows for more centralized management of a nationwide product ordering system.

The inf rmation on each of the products and services available may be pr vided t the users in any of a number of ways. In one embodiment, the database of program schedule information stor d at each user location may include all the information for

ach product and s rvic -- a descripti n of the product(s) s rvice(s), price, and any ther information r quired. The disadvantage of this method, h wev r, is that if a large number of programs include products and services available for ordering, the 5 demands on the system memory are great. Another method is to standardize the products and services available so as to include in the database only a minimal amount of information necessary to identify the type of product or service. For example, if only videocassettes and transcripts are available, the database need 10 only include a flag for each listing indicating whether a videocassette, transcript, or both are available. Further simplification is possible if all transcripts videocassettes are priced the same. The screens illustrated in Figs. 43-46 may then be standardized screens for all products so 15 as to conserve memory space.

It will be recognized by those of ordinary skill in the art that many variations are possible. To provide mor flexibility, different categories of products and services may be established for different types of programs, such as movies, news 20 programs, sports, pay-per-view, etc. The microcontroller 16 may then be configured to select the product or service information displayed to the user based on the type of program. manner, when the user depresses the product ordering icon on the remote control, the microcontroller 16 determines the type of 25 program displayed in the program guide and selects the appropriate ordering screens for display. Similarly, with regard to price, different categories of prices may be set. The microcontroller 16 may then read the price category for the product from the database and display the appropriate price for the product in the screens 30 43-46.

An alternate embodiment of the disclosed product ordering system may be implemented as follows. Rather than indicating the availability of a product or service only in association with the program listings stored at the user location, 35 product availability may be indicated when the user is not in one of the program schedule display modes by overlaying the star icon on a program display signal if there is a pr duct r service associated with that program. In this manner, pr ducts and service associated with programs not included in the program

WO 96/34491 PCT/US96/05729

schedul informati n databas st red in DRAM 18 may also be made available to users. This embodiment is esp cially useful in connection with commercial advertisements and permits the user t place an order for the product or service being advertised using 5 the remote control device 40. Alternatively, the user may simply request to be placed on a mailing list to receive additional information about the product or service being advertised as well as other related products and services.

This alternate embodiment (which may be used 10 conjunction with the above-described embodiment) may be implemented as follows. The received program signal for the commercial or other program may include the information about the product or service associated with the program. The information may be included in the vertical blanking interval (VBI) of a 15 standard analog television signal, a technique well known to those of ordinary skill in the art. Similarly, the information may be included in an in-band digital channel for programs delivered in digital form. One advantage of including the information in the VBI or an in-band digital channel is that it eliminates the need 20 to consume memory space at the user location to store product and service information.

The modified system illustrated in the block diagram of Fig. 47 is one embodiment of a system that incorporates a product ordering system using the VBI into the program schedule system of 25 the present invention. In this modified system, a second receiver 30 is used to receive the television channel signal tuned by tuner 28 under control of microcontroller 16. The signal is then provided to a VBI decoder 30A which decodes the data contained in the VBI of the received television signal. This data is then 30 provided to buffer 15 and microcontroller 16 in the manner described above for the program schedule information. microcontroller 16 then determines whether the currently-tuned channel is displaying a program for which a product or service is available as indicated by the data in the VBI. If there is a 35 product or service available, microcontroller 16 causes the pr duct availability ic n t be ov rlaid n the television signal. In a preferred embodiment, the curr ntly-tuned tel vision signal c mprises a c mmercial advertisement and th product or servic available is associat d with the commercial. Either a ne-step or

multi-st p rd ring process may b utilized. For exampl, in th nly a single product, i.e., a product simplest emb diment, brochure, may b availabl . In this case, the microc ntroller 16 may be configured to cause the video overlay device 25 to display 5 a standard on-screen message such as "Press * to receive a brochure describing this product." This embodiment assumes that the user has previously provided his name and address or that the information is extracted from the program services billing system as discussed above. Alternatively, a multi-step process similar 10 to that described above may be implemented. Upon depressing the ordering icon key, the microcontroller 16 may extract additional information from the VBI describing the product or service and cause the video overlay device 25 to display it on the receiver. The microcontroller may then present a series of screens to the 15 user similar to those shown in Fig. 43 to obtain the information required from the user. In this case, however, the information for composing the screens is obtained from the program signal rather than the stored program schedule information. possible to store the screen formats as bit maps in memory and use 20 the information from the VBI to complete the information in the screens.

If the user chooses to order the product or service, the microcontroller receives the request and may process it as In the simplest embodiment, the microcontroller may follows. 25 simply time and channel stamp the request. By providing the time of the request and the channel tuned by the user at the time of the request, the system operator may determine the commercial or other program the viewer was watching at the time the product or service was ordered and thus provide the correct product or 30 service to the user. Alternatively, in a more sophisticated system, the microcontroller 16 may extract from the VBI or in-band digital channel product identification information and include the information with the user's request to identify the product or service ordered. The user's request may then be provided to the 35 cable headend and processed in any of the manners described above in c nnecti n with products and services associated with a program listing.

The f rm and c ntent f a particular computer program to implement the invention disclosed herein will be readily apparent

t those skill d in the art of video syst m programming and graphic display. A flow chart showing th operation logic of the system is sh wn in Figs. 36a-d. It will also be appreciated by those skilled in the art that there can be departure from th 5 specific embodiment of the invention described herein without departing from the true scope of the claims appended hereto.

W 96/34491 PCT/US96/05729 62

w claim:

5

10

15

20

1. An electronic television program schedule system with pr duct ordering capability comprising:

> storage means for storing program schedule information for a plurality of programs, said program schedule information comprising, for at least one of said programs, information indicating the availability for purchase of a tangible product associated with said at least one program;

user control means for issuing control commands; data processing means for receiving said control commands and for generating video display control commands:

a video display generator for receiving said video. display control commands from said data processing means and said program schedule information from said and displaying program means for said at least one program, information displayed program schedule information indicating to the user the availability of said product associated with said at least one program, said data processing means causing said display generator to display information describing said product in response to a first user control command.

- The system of claim 1 wherein said data processing 25 means generates an order for said product in response to a second user control command.
 - The system of claim 2 further comprising means for 3. transmitting said order to a remote location.
- The system of claim 3 wherein said transmitting 30 means comprises telephone lines.
 - The system of claim 2 wherein said user control means comprises an infrared remote control device.
- The system of claim 5 wherein said video display 6. a predetermined icon indicating displays 35 generator availability of said pr duct associat d with said at least one program.

- 7. The syst m f claim 6 wherein said rem t control devic c mpris s a k y designated by said icon for g nerating said first us r c ntrol command.
- 8. The system of claim 2 wherein said data processing 5 means further comprises means for authorizing said user request for said product prior to generating said order.
 - 9. The system of claim 8 wherein said user control means comprises means for providing an authorization code to said data processing means.
- 10. The system of claim 9 wherein said data processing means compares said authorization code provided by said user control means with a predetermined code previously provided to said data processing means and generates said order in response to said comparison.
- 15 11. The system of claim 3 wherein said transmitting means comprises coaxial cable.
 - 12. An electronic television program schedule system with product ordering capability comprising:
- storage means for storing program schedule information for a plurality of programs, said program schedule information comprising, for at least one of said programs, information indicating the availability for purchase of a tangible product associated with said program;
- user control means for issuing control commands;
 data processing means for receiving said control
 commands and for generating video display control
 commands;
- a video display generator for receiving said video display control commands from said data processing 30 means and displaying program schedule information for said at least one program, said displayed program schedule information comprising an icon indicating the availability of said product associated with said at least one program, said data processing means causing 35 said display generator to display inf rmation describing said product in resp nse to a first user control command, said data processing means generating

25

30

35

an order for said pr duct in response to a second user contr 1 command; and

m ans for transmitting said order to an order processing facility.

- 5 13. The system of claim 4 further comprising automatic dialing means for automatically dialing a predetermined telephone number and transmitting said order over said telephone lines.
- 14. The system of claim 3, 4, 11 or 13 wherein said transmitting means transmits said order substantially immediately 10 following generation of said order.
- means causes said display generator to display information describing a plurality of products associated with said television program and said user control means comprises means for generating 15 a third user control command for selecting one of said plurality of products.
- 16. The system of claim 1 wherein said program schedule information for said at least one program comprises information identifying program categories, and said data processing means 20 selects said information describing said product based on the category of said at least one program.
 - 17. In an electronic television program schedule system, a method for providing product ordering capability comprising:

storing program schedule information for a plurality of programs, said program schedule information comprising, for at least one of said programs, information indicating the availability for purchase of a tangible product associated with said program;

providing user control commands to a data processing means,

generating video display control commands in response to said user control commands;

receiving said video display control commands from said data processing means and said program schedule informati n fr m said st rage m ans and displaying pr gram schedule information for said at 1 ast on pr gram, said displayed pr gram schedule inf rmation

indicating to the user the availability of said product associat d with said at 1 ast one pr gram, and

displaying information describing said product in response to a first user control command.

- 18. The method of claim 17 further comprising generating an order for said product in response to a second user control command requesting said product.
 - 19. The method of claim 18 further comprising transmitting said order to a remote location.
- 10 20. The method of claim 19 wherein said transmitting step comprises transmitting said order using telephone lines.
 - 21. The method of claim 20 comprising using an infrared remote control device to provide said user control commands.
- 22. The method of claim 17 further comprising 15 displaying a predetermined icon to indicate to the user the availability of said product associated with said at least one program.
- 23. The method of claim 18 further comprising authorizing said request for said product prior to generating said 20 order for said product.
 - 24. The method of claim 23 wherein said authorizing step comprises providing an authorization code to said data processing means and comparing said provided code with a predetermined code stored in said data processing means.
- 25. The method of claim 19 wherein said transmitting step comprises transmitting said request on coaxial cable.
 - 26. The method of claim 20 further comprising automatically dialing a predetermined telephone number and transmitting said stored request over said telephone lines.
- 30 27. In an electronic television program schedule system, a method for providing product ordering capability comprising:
- storing program schedule information for a plurality of programs, said program schedule information comprising, for at least one of said programs, inf rmation indicating the availability for purchase of a tangible product associated with said program,

5

10

WO 96/34491 PCT/US96/05729 66

> providing user control commands data to processing means,

> generating video display control commands response to said user control commands,


displaying television program schedule information for at least one program, said displayed program schedule information comprising an icon indicating the availability of a product associated with said program.


displaying information describing said product in response to a first said user control command,

generating an order for said product in response to a second said user command, and


transmitting said order to an order processing facility.


- 28. The method of claim 19, 20, 26 or 27 wherein said 15 is transmitted substantially immediately order following generation of said order.
- The method of claim 18 further comprising displaying information describing a plurality of products 20 associated with said at least one program and generating a third user control command for selecting one of said plurality of products.
- 30. The method of claim 17 wherein said program schedule information comprises information identifying program 25 categories and selecting information describing said product for display based on the category of said at least one program.
 - method of claim The comprising transmitting said order to a remote location.
- The method of claim 31 wherein said order is 30 transmitted substantially immediately upon generation of said order.
 - The system of claim 9, 10, or 11 further comprising 33. means for transmitting said order to a remote location.
- The system of claim 33 wherein said transmitting 35 means transmits said order substantially immediately upon generation f said rd r.

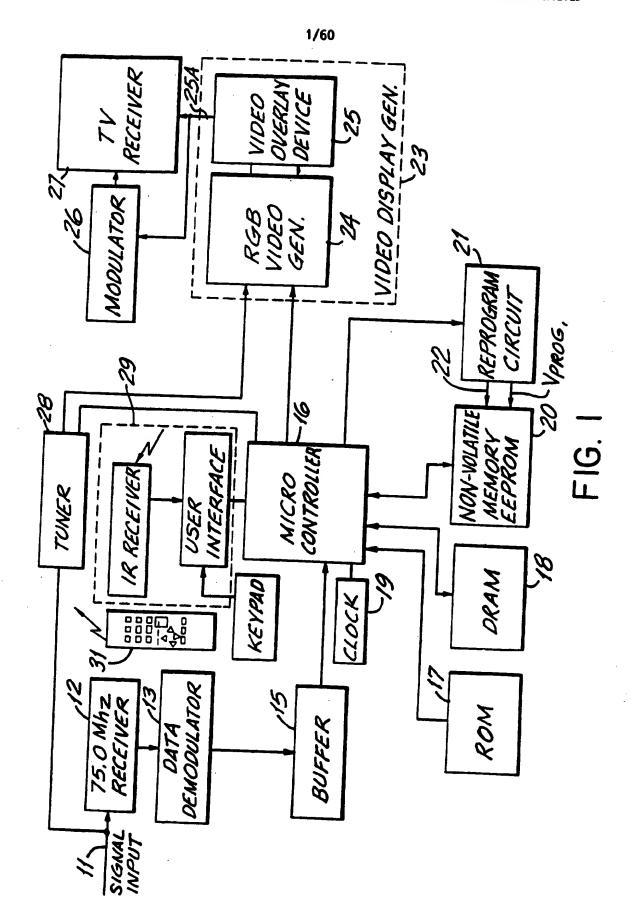


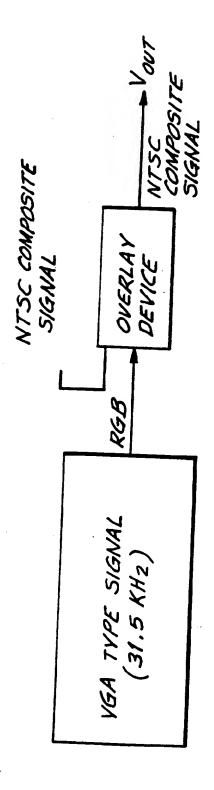

F16.2

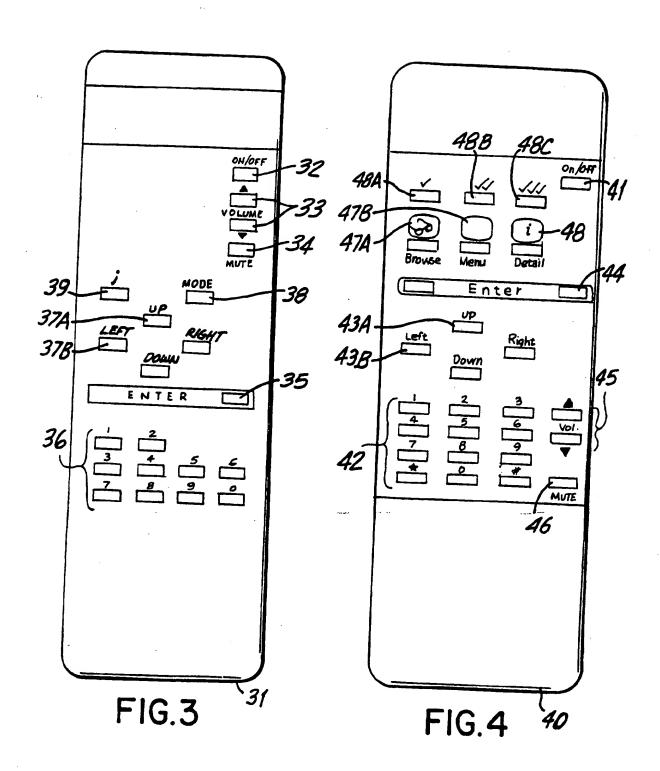

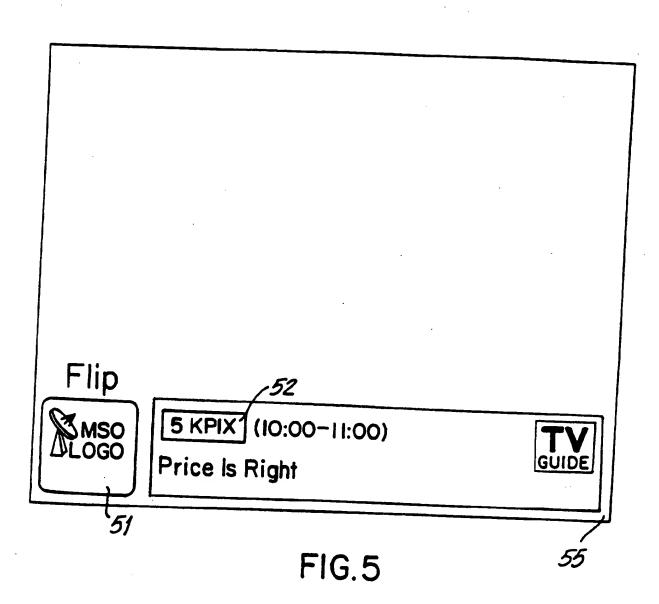

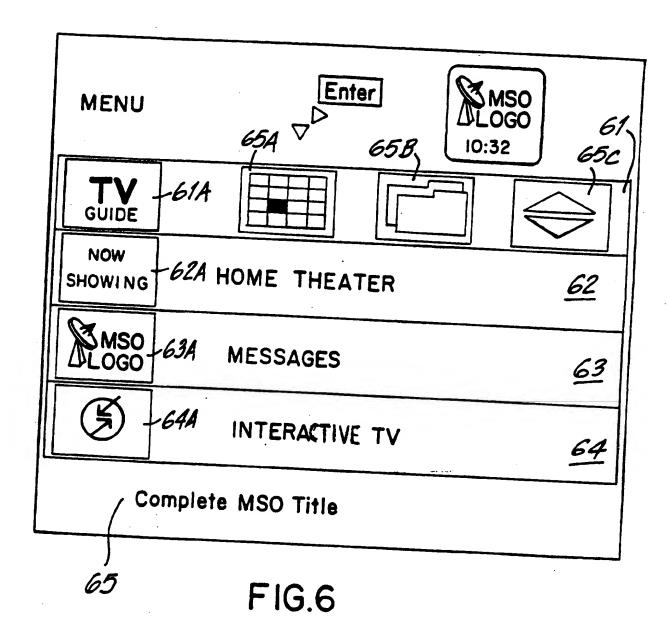

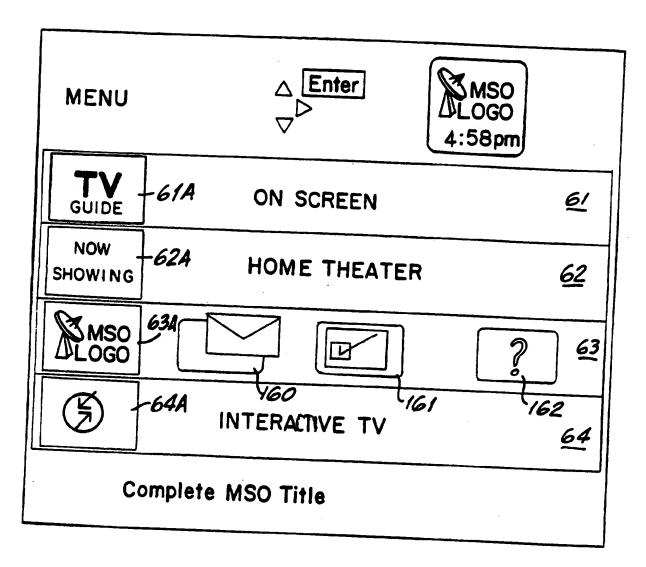


FIG.6A

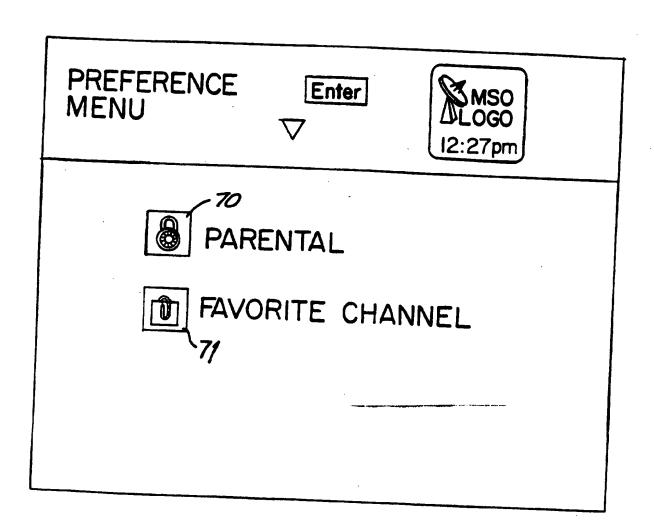


FIG.7

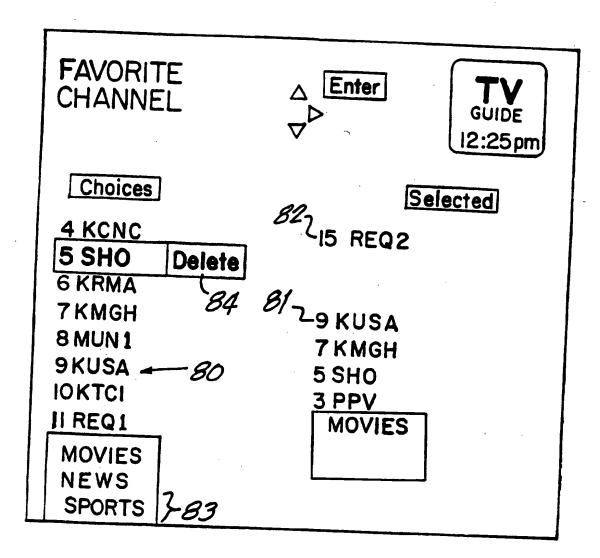


FIG.8

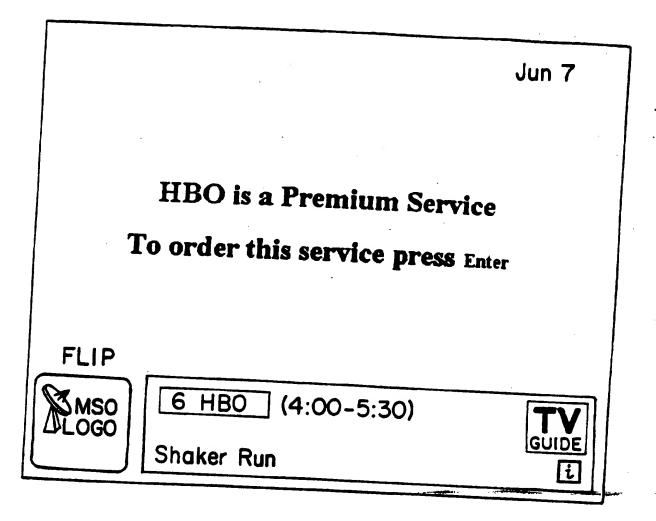


FIG.9

HBO Home Box Office \$10.40/Month	
	om)
SHO Showtime \$9.95/Month	
DIS The Disney Channel \$9.95/Month	
TMC The Movie Channel \$1.50/Month	
MAX Cinemax \$9.95/Month	
PLA Playboy at Night \$4.95/Evening(5:00p	mto 7:00 \
ACT Action \$5.95/Day(II:OOpm to 3:OOpm)
Movie, special events and family programming!	
You are not a Subscriber. Press Enter o Subscr	ribe!

FIG. 10

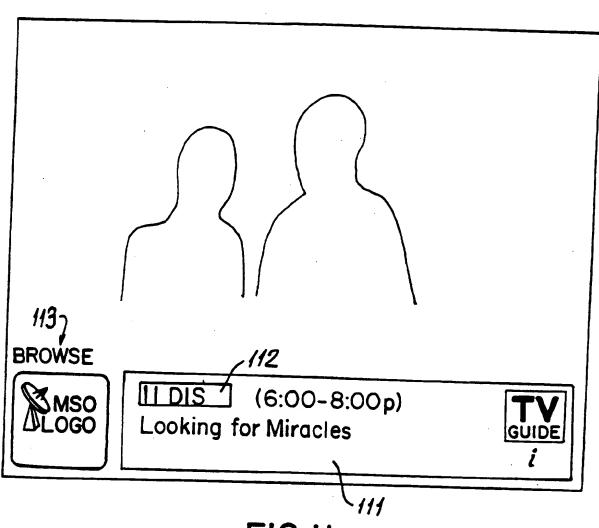


FIG.II

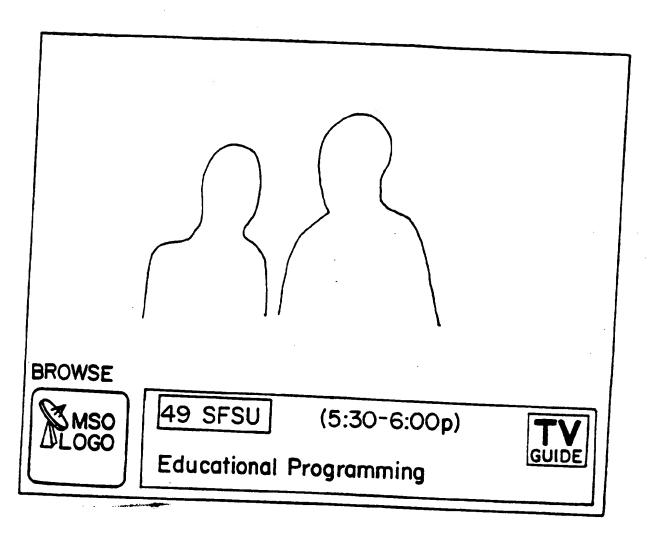


FIG.12

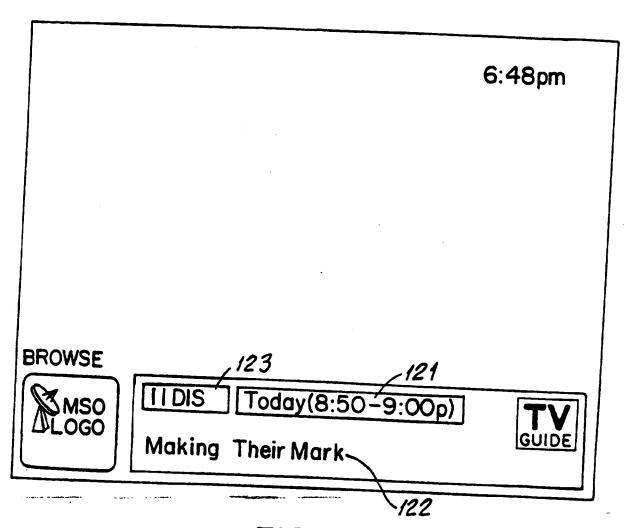


FIG. 12A

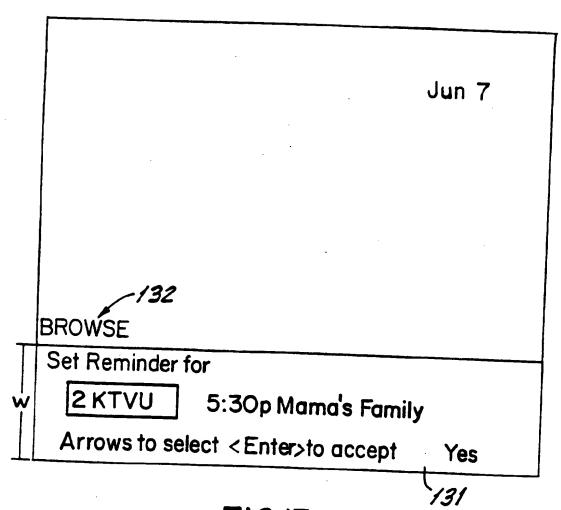
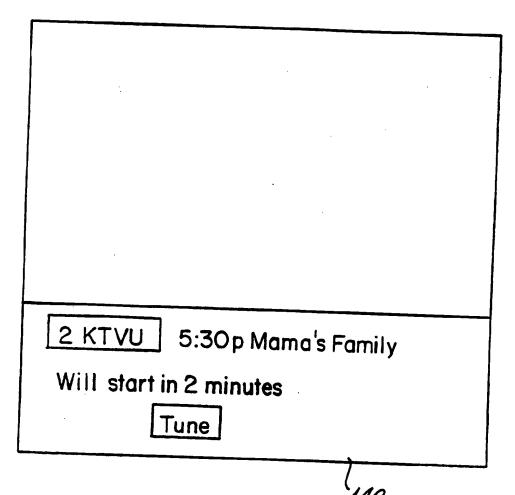


FIG.13



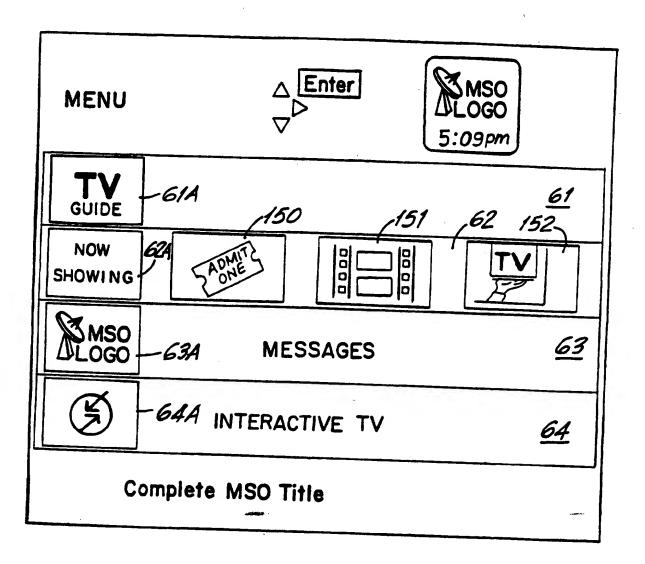


FIG.15

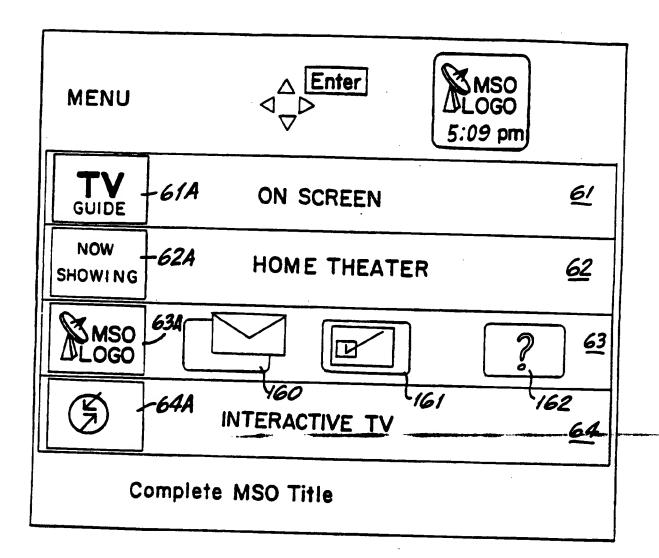


FIG.16


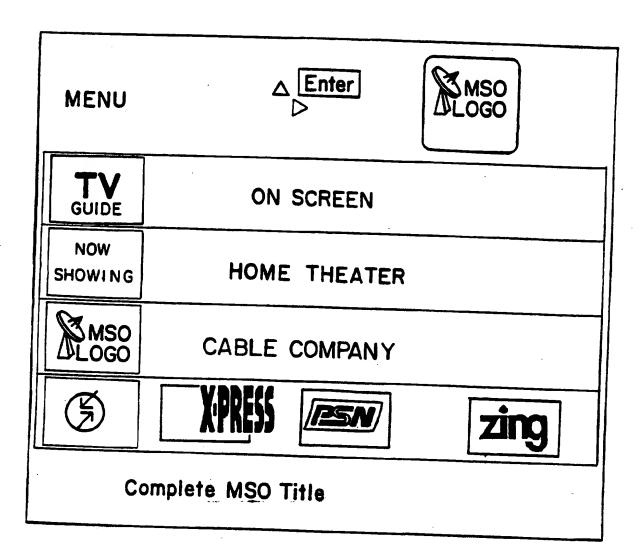


FIG.17


8:30p Blossom 7:13 pm GUIDE Murphy Brown Fresh Prince 8:00p Day One JFK Δ [Enter Ent. Tonight Major Dad JFK: In His Own Words |Baseball (4:30-7:30p) 7:30p Wheel of Fortune Jeopardy! Baseball Evening 7:00p Shade Listings AII-180 4 KRON Today 185-4 KRON 5 KPIX 6 HB0 7 KG0

F1G. 18

	T 6.2
Listings By 201 Enter Channel 2022, 2026 6:50 pm 183 Channel 2022, 2026 1 2026 3 PREV 4 KRON 5 KPIX 7:30p Baseball 7:30p Blossom 9:00p Fresh Prince 8:30p Blossom 9:00p Per yMason: Notorious Nun 11:30 Tonight 12:30a David Letterman	

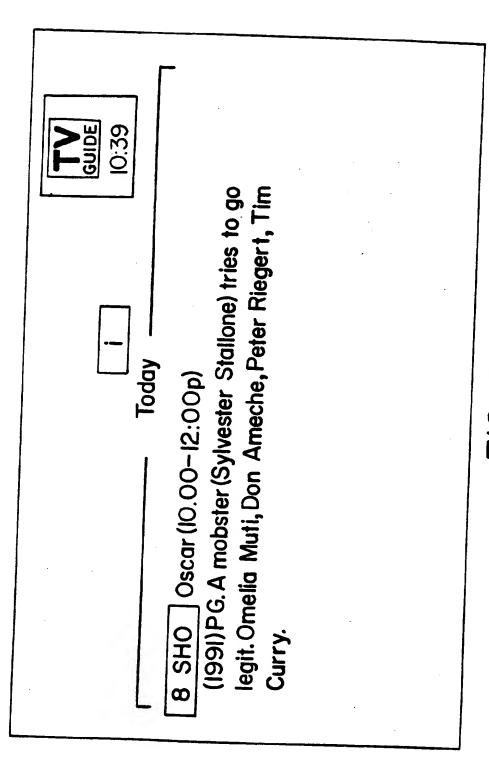

F16.21

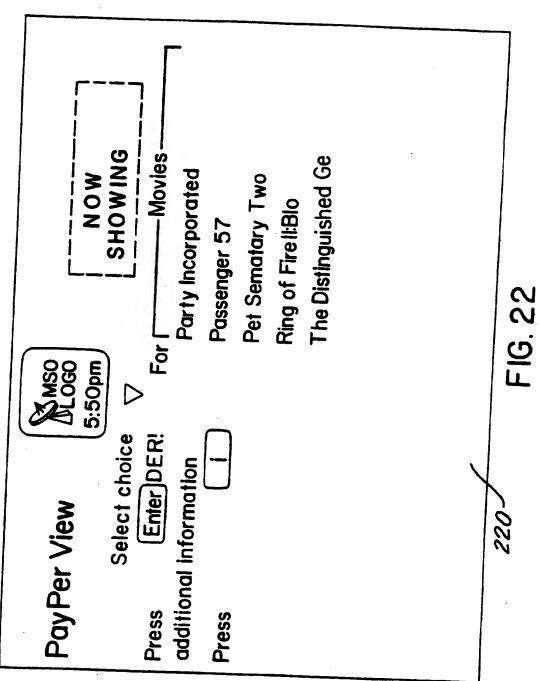

Pay Per View	Enter	MSO	•
Ordering 5	7 .	5:49 PM	·
Passenger 57		\$ 3.99	
What time would yourlike	e this show to	o start?	230C
70day 9:00p Tomw 230A	12:00p To	mw 6:00p	-500
Would you like to see a co	untdown one		
just before the show start		Yes	No
	P	PV/	7
		Source	

FIG.23

Pay Per View Confirmation

Enter

MSO LOGO 5:49 pm

You have requested to order:

Passenger 57

\$3.99

NO, I DO NOT WANT TO ORDER.

PPV / Source

Pay Per View Confirmation



You have requested to order:

Passenger 57

\$3.99

Yes, I would like to order

Passenger 57 has been Ordered! Tune to Channel I Today at 9:00pm.





FIG.24A

LIST	ΓINGS	1	∆ Disti	ing ⊲	> 6	6:06PA	UG 16
5:00	5:30	6:00	6:30	7:00	7:30	8:00]
NBC	4	News	·				j
ABC		News		•			
		CBS N					
Fox	28	Club F	Paradi	se (5:	00)		
PBS	29	Vlyste	ry!		•		
COM	30	Tribut	e to C	arson	1		
HBO	33 (Gremli	ns 2: 7	The N	ew Ba	atch	
ESN	34	Tennis	(4:30)			
AMC	35	Arise	my Lo	ve (5:	00)		
		Vatura		ild			
NIK	38	Love	Lucv				

Premium Enter Services	
HBO Home Box Office \$10.40/Month	
SHO Showtime \$9.95/Month	
DIS The Disney Channel \$9.95/Month	
TMC The Movie Channel \$1.50/Month	\dashv
MAX Cinemax \$9.95/Month	\dashv
PLA Playboy at Night \$4.95/Evening(5:00pm to 3:00a	
ACT Action \$5.95/Day(II:00pm to 3:00pm)	\exists
Movie, special events, and family programming!	+
You are not a Subscriber. Press Enter o Subscribe!	

FIG.26

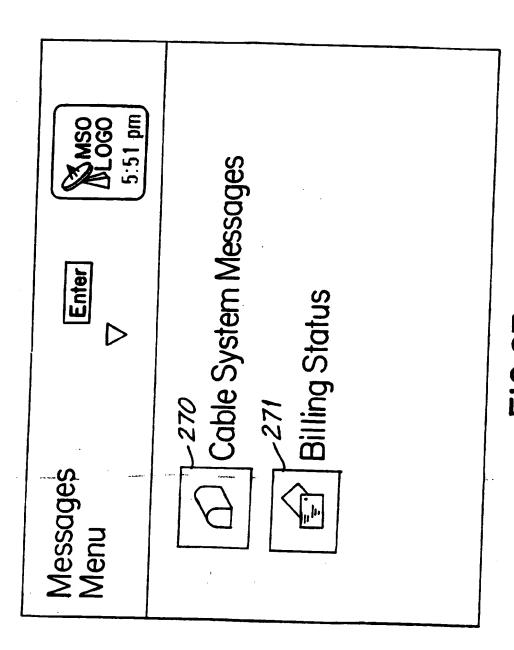

F16.27

MSO MLOGO 5:52 pm	Per View is featuring "Batman Returns" this month. a free sneak peek of HBO this weekend.) Title
Cable System Messages	Pay Per View is featuring "Batman Returns" Get a free sneak peek of HBO this weekend.	Complete MSO Title




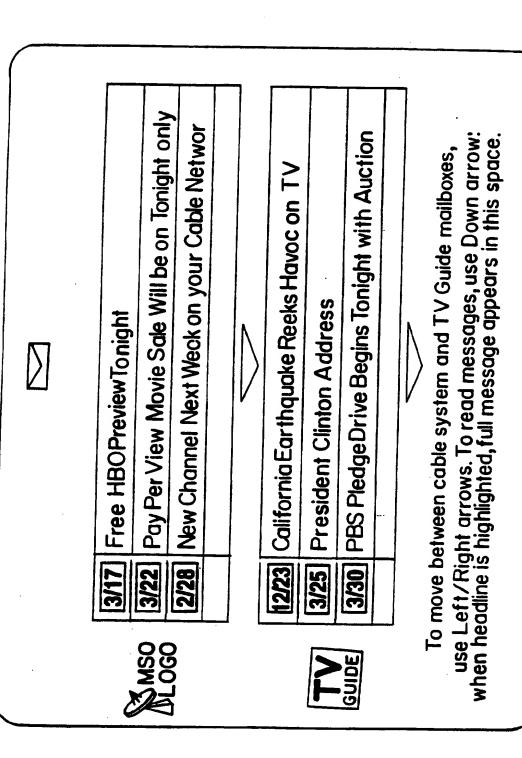


FIG. 28A

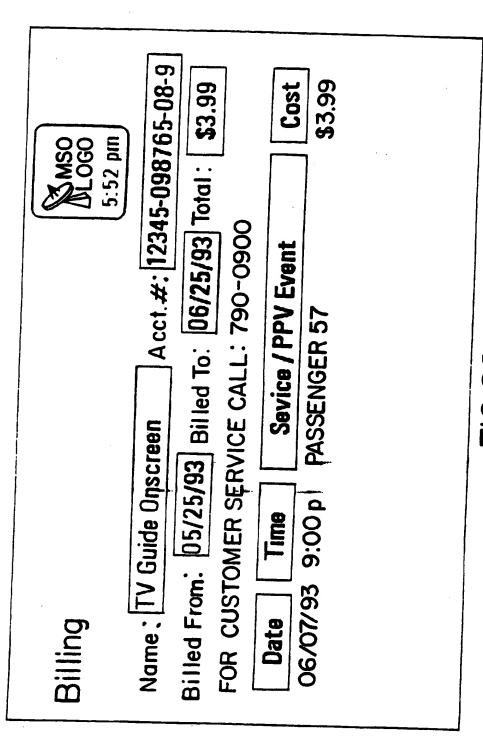

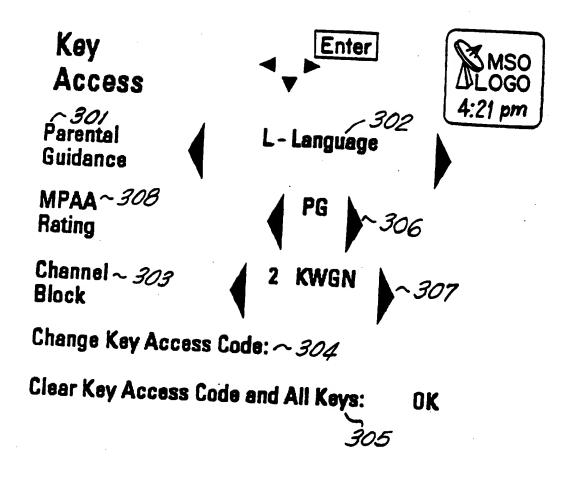

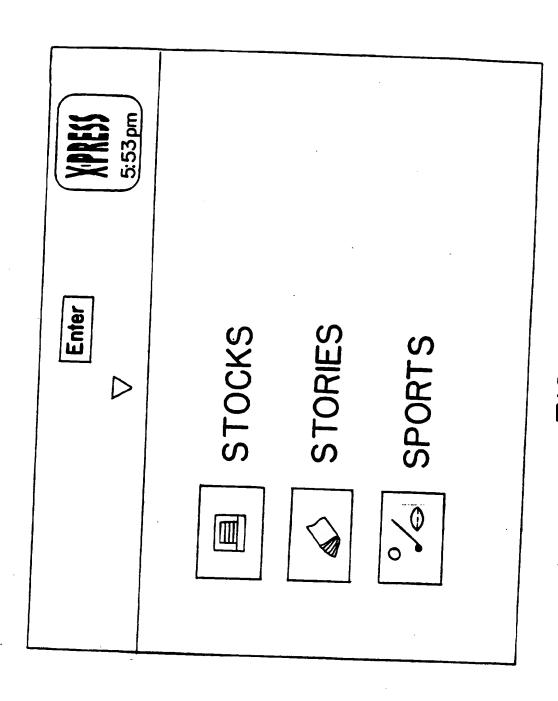

F16.31

XPR55 5:53pm	Change	-0.25	-0.125	0	0.625	5	-0.5	-0.375	-0.125	43	
	Vol(100s)	5415	129	22 (873	0	- 22970	5	407	rtfolio Value is 433200 and your gain is 443	
	Last	8	29.75	10.5	18.125	18	18.25	19.25	5.375	s 433200 a	
	Symbol	CMCSA	CVC	NOS	LBTYA	LBTYB	TCOMA	TCOMB	TUNE	tfolio Value i	
Quote	Alarms			. (\triangleleft				Por	

FIG. 32

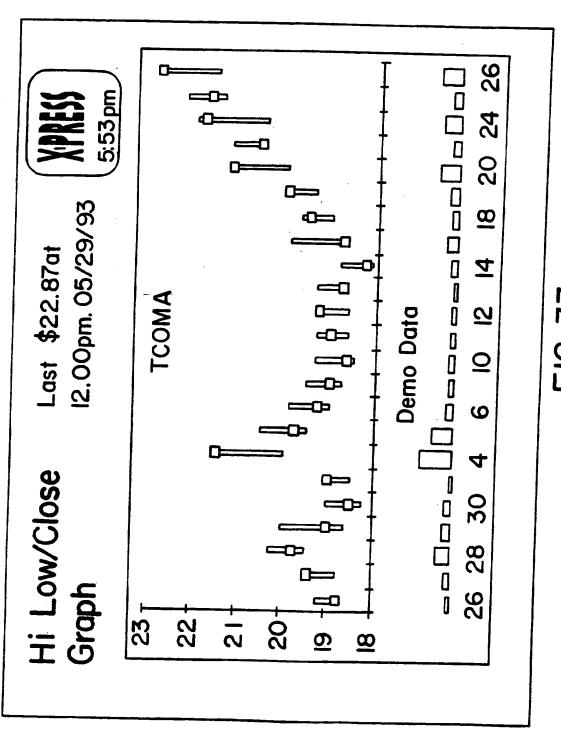


FIG. 33

STORIES



US World News

Cubans use Vitamins to combat epidemic

Geneva - A costly campaign to provide vitamins to all Cubans has helped curb a mysterious epidemic that has afflicted thousands with vision problems, a World Health Organization offical said yesterday.

The outbreak of optical neuritis has dimmed the vision of about 20,000 Cubans and a related malady has affected 6,000 other people, mostly women.


SPORTS



Major League Baseball

Yesterday in National League Action Colorado 7, Houston 5 San Francisco 5, Chicago 4

Yesterday in American League Action Detroit 4, Boston 1 Toronto 4, Milwaukee 2

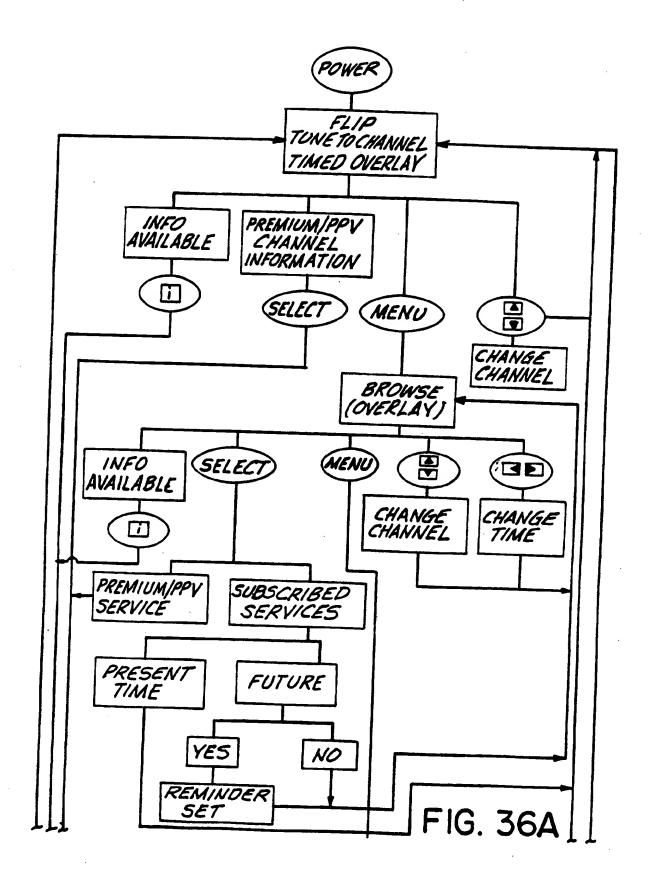

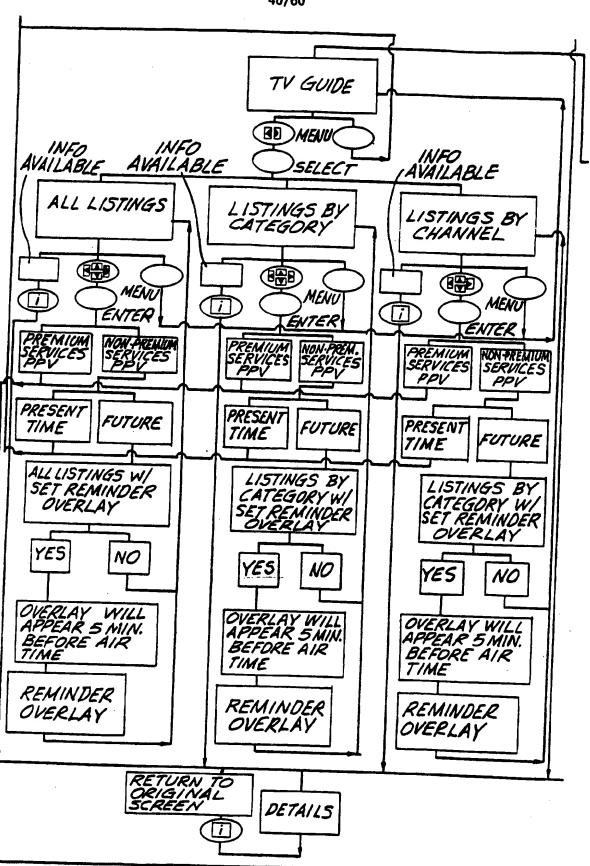


FIG. 36B

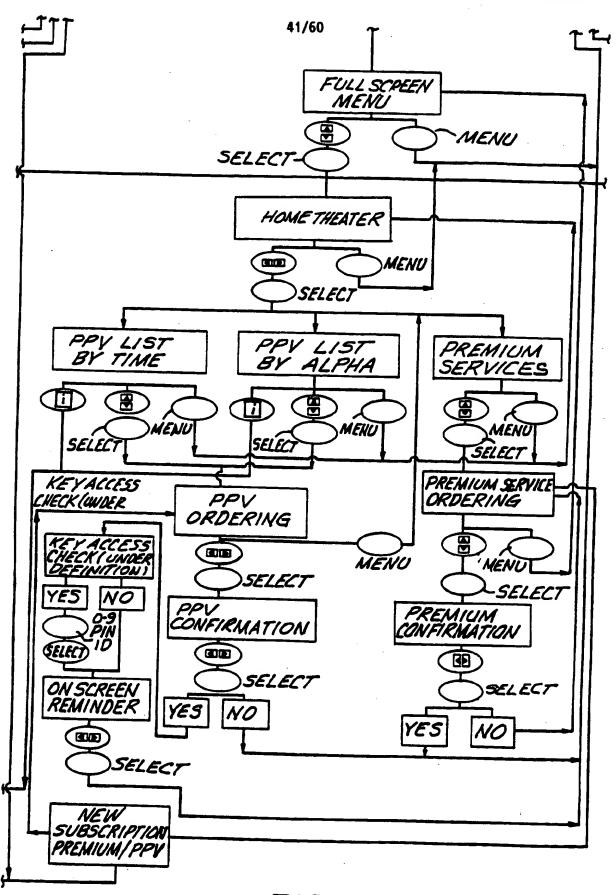


FIG. 36C

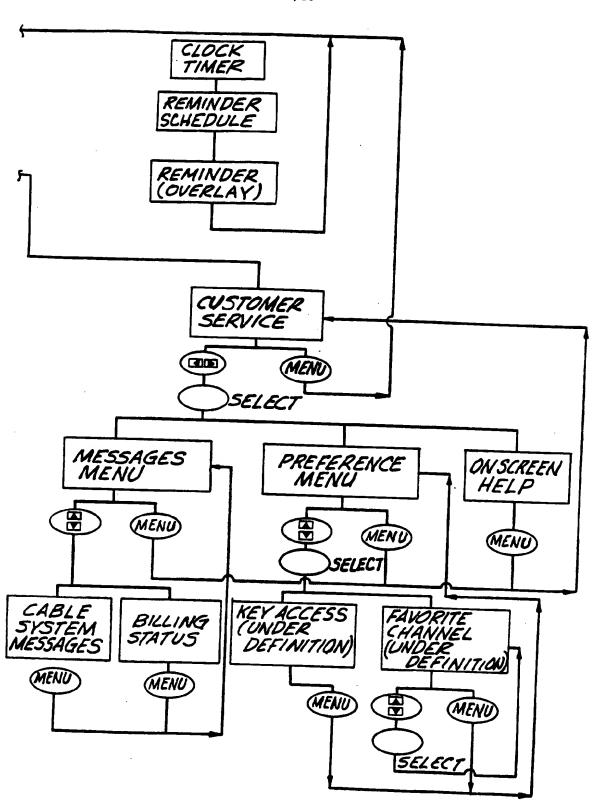


FIG. 36D

TV GUIDE	LOCA	ATOR		
Broadcast: Cable: Cable: Cable: Q Premium: PPV:	2 KWGN 41 A&E 21DIS 11 REQ1 Clear Al	3PPV 3AMC 18ENC 15REQ2 L favorite ch	4 KCNC 24 BET 14 HBO	1 1
Favorite Cha	nnel [included	Excluded	

FIG. 37

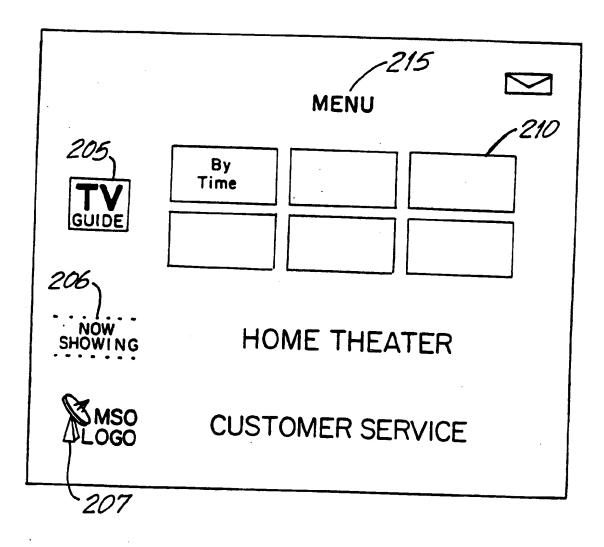


FIG.38

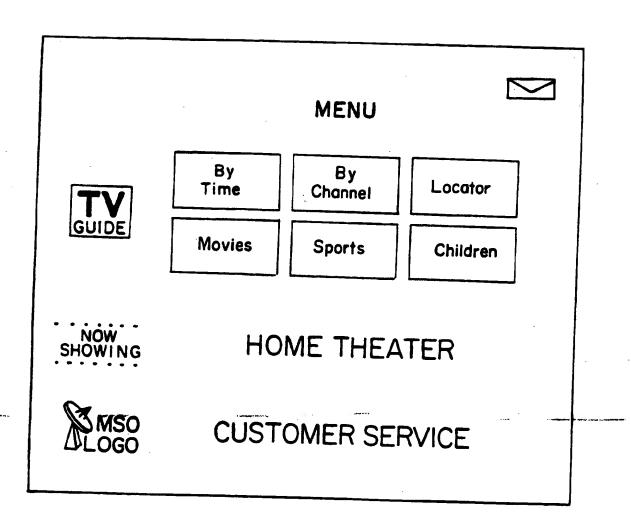


FIG.38A

Extra Extra Line 51CSPN2 Gov't Program(10–10a) 52 SPICE Mom and Dad Save the Wor 53 KWHD Religious Programming(1) 54 MUN2 Public Access(12–12m) 2 KWGN NBA Basketball (6-30–10 on have requested this program at 4PM. To complete the ordering enter your four-digit purchase Code: 8 s

FIG. 38B

TV				
Movie Rating: Parental	d PG	PG-	13 R	D
Guidance:	Adult The	mes	Sexual Situations	D
Channel:	4 2KWGN	3PPV	4 KONC	<u>a</u> lo
Locked Program:	To lock out a	program or	series see "Hei	
Lockout Code:	Clear		Change	

FIG. 39

	1260	
TV GUIDE /275	SETUP	
Text Location: Lockout Code:	Bottom of Screen Top of Screen New	
Purchase Code: 270	New Clear Change	
This button sets	s the text location to the bottom of the Screen. Press OK to select	

FIG. 40

8:32 PM

igtriangledown



You do not have a
Lockout Code set.
To restrict the availability
of certain channels
or programs,
use your remote to
enter four digits
(for example, 4567).

Lockout Code:

FIG.40A



To restrict the ability to order programming, use your remote to enter four digits (for example, 1234),

Purchase Code:

FIG.40B

50/60

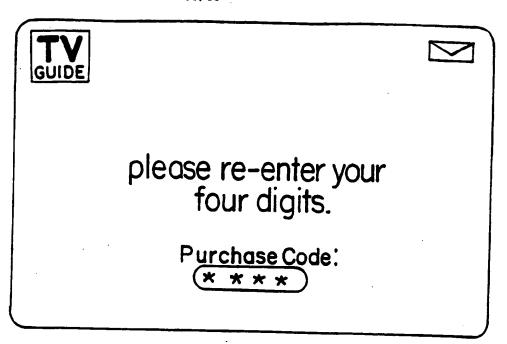


FIG.40C

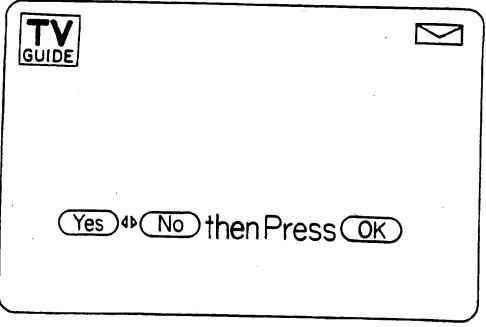


FIG.40D

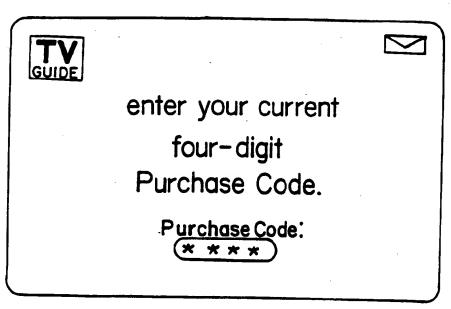


FIG.40E

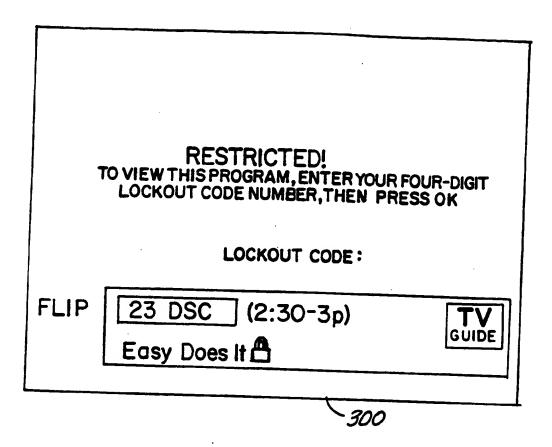


FIG.41


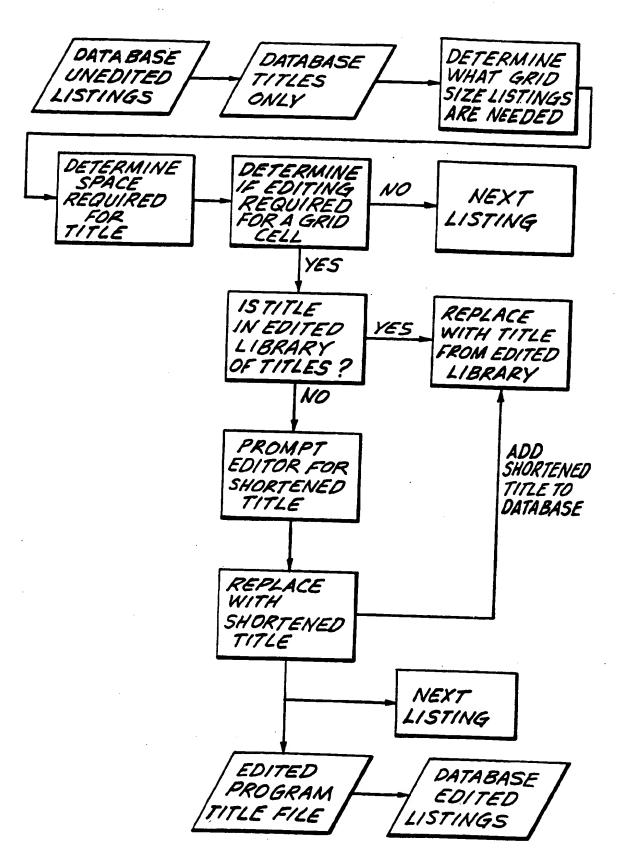


FIG. 42

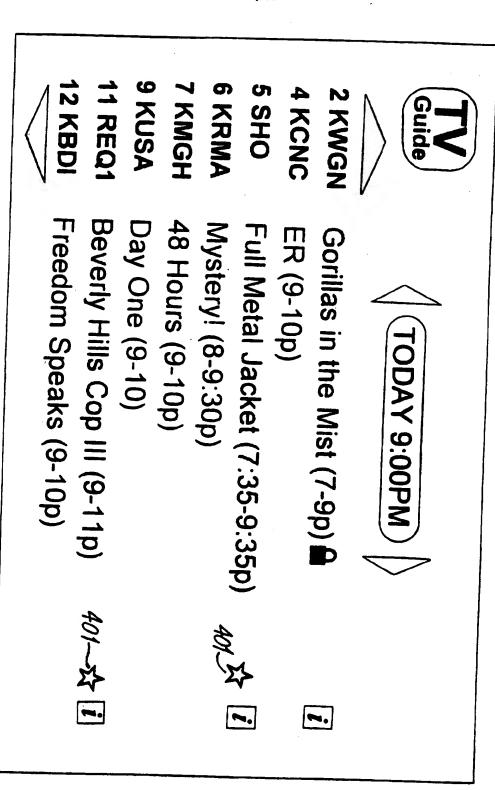

F1G.43A

Card #:

TUI
Met
al Ja
Cket
• •

SHA \$29.95

this program, select a format then press (OK) To order a professionally produced video cassette of

Video tape Format: ⟨ VHS

FIG.43B

Full Metal Jacket

SHA UPS \$39.95

you would like to use for this order, then press OK Please select the payment and shipment methods

Payment Method:

Visa

Shipment Method: Fed-X Exp. Date:

FIG.43C

-

Full Metal Jacket

SHS UPS \$34.95

and handling. Please review your order. Price includes shipping

Confirm (Cancel

then press OK)

FIG. 43D

Full Metal Jacket

SHA UPS \$34.95

Please review your order. Price includes shipping and handling. To confirm this order, please enter your tour-digit purchase code

Purchase code:

 \rightleftharpoons

Cancel

then OK

FIG.43E

To order a written transcript, or a video cassette of this program, select a format then press OK 48 Hours Jan.20, 1995 (Transcript) SHV Transcript \$4.95 Beta

FIG.44

FIG.45


11 REQ1 (7-9p)
Full Metal Jacket ☆ Guide VT

To return to the menu of additional music selections, press

FIG.46

84 DMX5) Alternative Rock

Counting Crows: Mr. Jones i *

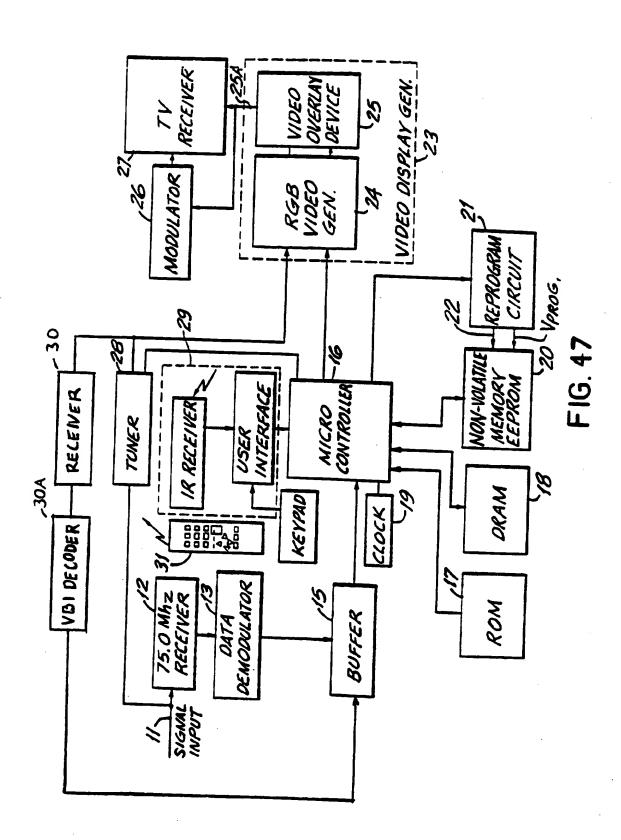

SUBSTITUTE SHEET (RULE 26)



ational Application No PCT/US 96/05729

A. CLASSIFICATION OF SUBJECT MATTER
1PC 6 H04N7/025 H04N7/173

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols) IPC = 6 + 0.4N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO,A,94 14284 (DISCOVERY COMMUNICATIONS INC) 23 June 1994 see the whole document	1-34
A	WO,A,94 14282 (DISCOVERY COMMUNICATIONS INC) 23 June 1994 see the whole document	1-34
٩	WO,A,94 14283 (DISCOVERY COMMUNICATIONS INC) 23 June 1994 see the whole document	1-34
>,χ	WO,A,95 32583 (TV GUIDE ON SCREEN) 30 November 1995 see the whole document	1-34
	-/	

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention. "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone. "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "&" document member of the same patent family
Date of mailing of the international search report
2 6. 08. 96
Authorized officer Poirier, J-M



PCT/US 96/05729

		PC1/03 90/03/23			
.(Continu	inustion) DOCUMENTS CONSIDERED TO BE RELEVANT Relevant to claim No.				
ategory *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.			
Α,	WO,A,95 32585 (TV GUIDE ON SCREEN) 30 November 1995 see the whole document	1-34			
, ,	WO,A,96 09721 (TV GUIDE ON SCREEN) 28 March 1996	1-34			
	see the whole document				
A	PROCEEDINGS OF THE 18TH INTERNATIONAL TELEVISION SYMPOSIUM AND TECHNICAL EXHIBITION, 10 - 15 June 1993, MONTREUX, pages 571-586, XPO00379382 BRUGLIERA V: "DIGITAL ON-SCREEN DISPLAY A NEW TECHNOLOGY FOR THE CONSUMER INTERFACE" see the whole document	1-34			
A	PROCEEDINGS FROM ELEVEN TECHNICAL SESSIONS OF 42ND ANNUAL CONVENTION AND EXPOSITION OF THE NATIONAL CABLE TELEVISION ASSOCIATION, 6 - 9 June 1993, SAN FRANCISCO, pages 185-191, XP000410499 COX J ET AL: "EXTENDED SERVICES IN A DIGITAL COMPRESSION SYSTEM" see page 190, right-hand column - page 191, left-hand column	1-34			
	·				
	·				
	·				
	·				
	P. Control of the con				

1


niormation on patent family members

PCT/US 96/05729

Patent document cited in search report	Publication date		family ber(s)	Publication date
WO-A-9414284	23-06-94	AU-B-	5732994	04-07-94
		AU-B-	5733094	04-07-94
		AU-B-	5733194	04-07-94
		AU-B-	5733294	04-07-94
		AU-B-	5736394	04-07-94
		AU-B-	5845894	22-06-94
		AU-B-	5869894	04-07-94
		CA-A-	2151458	23-06-94
		CN-A-	1093211	05-10-94
		CN-A-	1090451	03-08-94
		CN-A-	1090452	03-08-94
		CN-A-	1096151	07-12-94
		CN-A-	1090453	03-08-94
		CN-A-	1090454	03-08-94
		EP-A-	0673578	27-09-95
		EP-A-	9673579	27-09-95
	•	EP-A-	0673580	27-09-95
		EP-A-	0673581	27-09-95
		EP-A-	0673582	27-09-95
		EP-A-	0673583	27-09-95
		EP-A-	0674824	04-10-95
		WO-A-	9413107	09-06-94
		WO-A-	9414279	23-06-94
		WO-A-	9414280	23-06-94
•		WO-A-	9414281	23-06-94
		WO-A-	9414282	23-06-94
		WO-A-	9414283	23-06-94
WO-A-9414282	23-06-94	AU-B-	5732994	04-07-94
		AU-B-	5733094	04-07-94
		AU-B-	5733194	04-07-94
		AU-B-	5733294	04-07-94
		AU-B-	5736394	04-07-94
,		AU-B-	5845894	22-06-94
		AU-B-	5869894	04-07-94
		CA-A-	2151458	23-06-94
		CN-A-	1093211	05-10-94
		CN-A-	1090451	03-08-94
		CN-A-	1090452	03-08-94
		CN-A-	1096151	07-12-94

PCT/US 96/05729

Patent document cited in search report	Publication date	member(s) date		Publication date
NO-A-9414282				03-08-94
		CN-A-	1090454	03-08-94
		EP-A-	0673578	27-09-95
		EP-A-	0673579	27-09-95
		EP-A-	0673580	27-09-95
		EP-A-	0673581	27-09-95
		EP-A-	0673582	27-09-95
		EP-A-	0673583	27-09-95
		EP-A-	0674824	04-10-95
		WO-A-	9413107	09-06-94
		WO-A-	9414279	23-06-94
		WO-A-	9414280	23-06-94
	•	WO-A-	9414281	23-06-94
		WO-A-	9414283	23-06-94
		WO-A-	9414284	23-06-94
10-A-9414283	23-06-94	AU-B-	5732994	04-07-94
		AU-B-	5733094	04-07-94
		AU-B-	5733194	04-07-94
		AU-B-	5733294	04-07-94
		AU-B-	5736394	04-07-94
		AU-B-	5845894	22-06-94
		AU-B-	5869894	04-07-94
		CA-A-	2151458	23-06-94
		CN-A-	1093211	05-10-94
		CN-A-	1090451	03-08-94
		CN-A-	1090452	03-08-94
•		CN-A-	1096151	07-12-94
		CN-A-	1090453	03-08-94
		CN-A-	1090454	03-08-94
		EP-A-	0673578	27-09 - 95
		EP-A-	0673579	27-09-95
		EP-A-	0673580	27-09-95
		EP-A-	0673581	27-09-95
		EP-A-	0673582	27-09-95
•		EP-A-	0673583	27-09-95
		EP-A-	0674824	04-10-95
		WO-A-	9413107	09-06-94
		WO-A-	9414279	23-06-94
		WO-A-	9414280	23-06-94



nformation on patent family members

PCT/US 96/05729

Patent document cited in search report	Publication . date	Patent family member(s)		Publication date
WO-A-9414283		WO-A- WO-A- WO-A-	9414281 9414282 9414284	23-06-94 23-06-94 23-06-94
WO-A-9532583	30-11-95	AU-B-	7394494	18-12-95
W0-A-9532585	30-11-95	AU-B-	7200894	18-12-95
WO-A-9609721	28-03-96	AU-B-	3681895	09-04-96

Form PCT/ISA/218 (patent family annes) (July 1992)

---- 7 -5 7